

# Design of a Rectangular Fractal Patch Geometry for Modern Communication Systems

Ruchika Jain, Deepak Bhatnagar, Kirti Vyas

**Abstract:** In modern wireless communication systems, compact multiband antennas with wider bandwidth and low profile configuration are in great demand. This has initiated antenna research in many directions. One of such antennas is a fractal shaped antenna element. The fractal structures may be designed by stacking of numerous small units together in such a way that the final geometry has the same shape as that of the unit structure. In addition to their larger bandwidths, fractal antennas are compact in size relative to the conventional antennas because of their efficient volume filling nature. In the present paper, design of new compact fractal multiband antenna geometry is presented. This antenna is targeted for application in Wi-MAX communication systems which operates in three bands namely lower band (2.3 to 2.9 GHz), medium band (3.4 to 3.96 GHz) and upper band (5.25 to 5.85 GHz). Two iterations of the rectangular fractal multiband antenna, with probe feeding in 2-6 GHz band are examined. The proposed antenna resonates at three frequencies namely 2.8 GHz, 3.95 GHz and 5.8 GHz after 2nd iteration. These three frequencies lie in the three considered bands. From the return loss variations with frequency; it is realized that proposed antenna may also be used for Wi-Fi (5.1-5.825 GHz) applications. Finally this antenna is fabricated and its return loss, VSWR and input impedance variations with frequency are tested.

## Antenna Configuration -

The design parameters of proposed antenna are as follows:

- The base antenna geometry is a rectangle with width length ' $a$ ' = 20.2mm and width ' $b$ ' = 19.8mm.
- The antenna structure is simulated on glass epoxy FR4 dielectric substrate having dielectric constant ( $\epsilon_r$ ) and loss tangent ( $\tan\delta$ ) of the substrate equal to 4.4 and 0.025 respectively. The thickness of substrate is  $h = 1.59$ mm and the patch thickness is 0.0035mm.
- The antenna is fed through a 50 $\Omega$  coaxial probe of diameter 1.24mm.




Fig. 1: Design of considered patch geometry

The geometry of final patch geometry is given in figure 1. This geometry is obtained after several optimizations in each step of iteration. The variations of reflection coefficient and input impedance of antenna suggests that antenna is resonating at three frequencies namely 2.8 GHz, 3.95GHz and 5.8GHz. These three frequencies lie in the three frequency

bands allocated for modern days Wi-Max communication systems. Corresponding to these frequencies, the impedance bandwidths are 7.3%, 30% and 11.1% respectively. These bandwidths are much higher than those obtained for a conventional rectangular patch antenna with same patch size.

The three simulated input impedances are  $(55.59-3.38j)\Omega$  at frequency 2.8GHz,  $(55.59-3.38j)\Omega$  at frequency 3.95GHz and  $(55.59-3.38j)\Omega$  at frequency 5.8GHz, which are close to 50  $\Omega$  impedance of coaxial probe.

## Simulation and Measured Results-

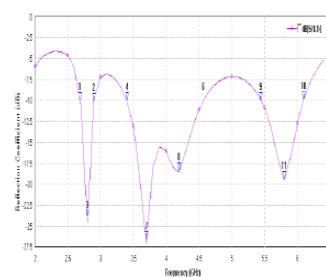


Fig. 2(a): Simulated variation in reflection coefficient of antenna with frequency

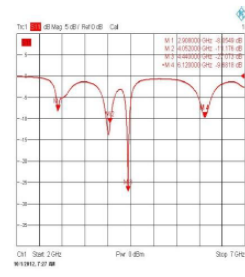


Fig. 2(b): measured variation in reflection coefficient of antenna with frequency

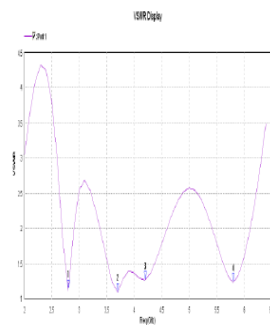


Fig 3(a) simulated variations in VSWR with frequency

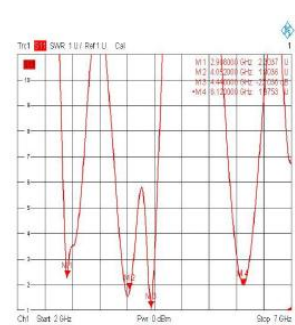


Fig3(b) Measured Variations in VSWR with frequency




Fig. 4(a): Simulated variation in smith chart of antenna with frequency




Fig.4(b) measured Variation in smith chart of antenna with frequency

The two dimensional simulated E and H plane radiation patterns of the antenna are shown in figs. 5(a) - 5(d) respectively. These patterns are obtained for all the three frequencies bands achieved through simulation analysis and representative patterns are reported here in lower band and median band. In the first frequency band where resonance frequency is 2.8 GHz, both E and H planes, patterns are symmetric in nature and the direction of maximum radiations is normal to patch geometry. In the second frequency band

Manuscript received on November, 2012.


Ruchika Jain, Arya college of Engg & I.T, Jaipur, India.

Deepak Bhatnagar, Professor, Department of Physics, University of Rajasthan, Jaipur, India.


Kirti Vyas, Associate Professor, Arya college of Engg & I.T, Jaipur, India.

from 3.41 GHz to 4.63GHz where resonance frequency is 3.95 GHz, again both E and H planes, patterns are symmetric in nature and the direction of maximum radiations is normal to patch geometry. At resonance frequency 3.4GHz; the E plane patterns are little more directive than H plane patterns. In the third frequency band from 5.4 GHz to 6.09GHz where resonance frequency is 5.8 GHz, both E and H planes, patterns are no more symmetric in nature and the direction of maximum radiations is inclined at an angle  $\theta = 60^\circ$ .


In the third frequency band in both simulated and measured input impedance variations, a very small loop is realized. This suggests a possibility, of circular polarization. It is verified through simulation of axial ratio. If the axial ratio is less than 3dB; presence of circular polarization is confirmed. Through simulation analysis we realized that the axial ratio 2.6dB which confirms the circular polarization though it is not very pure in nature.

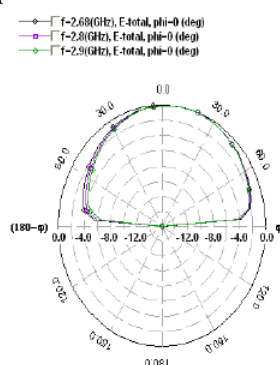


**Fig. 5(a): Elevation pattern gain display of final patch antenna in lower frequency band**

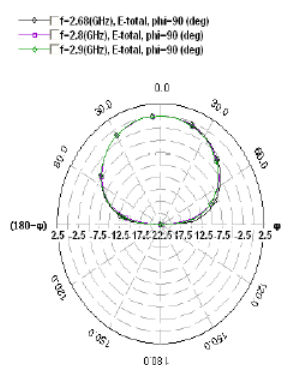

**Fig. 5(b): Elevation pattern gain display of final patch antenna in lower frequency band**

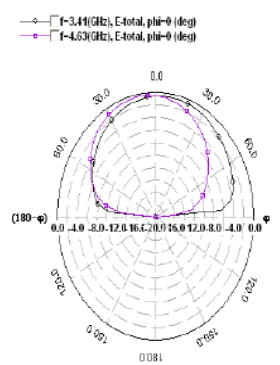

**Fig. 5(c): Elevation pattern gain display of final patch antenna median frequency band**

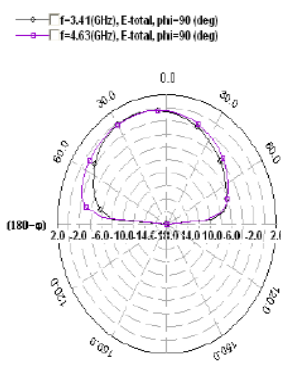

**Fig. 5(d): Elevation pattern gain display of final patch antenna median frequency band**

## CONCLUSIONS

Based upon the outcomes, it can be realised that proposed compact fractal geometry describes a multi-band behavior with improved impedance bandwidths. The simulated results indicate that the antenna exhibits good reflection coefficients at respective resonance frequencies and is suitable for Wi MAX & Wi-Fi (5.1-5.825 GHz) applications. Experimental Verifications are done by fabricating and measuring the antenna. The simulated and measured results are in good agreement.

## REFERENCES

1. Deschamps G. A. (1953) "Microstrip microwave antennas", 3rd USAF Symp. on Antennas.
2. Gutton H. and Baissinot G. (1955) "Flat aerial for ultra high frequencies", French patent No. 703113.

3. Howell J.Q. (1972) "Microstrip antennas", Dig. Int. Symp. Antennas Prop. Soc., Williamburg, VA, pp 177-180.
4. Ai-Jibouri B., Evans H., Korolkiewicz E., Lim E.G., Sambell A. and Viasits T. (2001) "Cavity model of circularly polarized cross-aperture-coupled microstrip antenna", IEE Proc.-Microwave. Antennas Propagation, Vol. 148, No. 3, pp 147-152.
5. Shen X. H., Delmotte P. and Vandenbosch G.A.E. (2001) "Effect of superstrate on radiated field of probe fed microstrip patch antenna" IEE Proc.-Microwave. Antennas Propagation, Vol. 148, no. 3, pp 141-146.
6. Verma A. K. and Nasimuddin (2001) "Input Impedance of Rectangular Microstrip Patch Antenna with Iso/Anisotropic Substrate-Superstrate" IEEE Microwave and Wireless Components Letters, Vol. 11, No. 11, pp 456-458
7. Gao S. C., Le W. L., Yeo T. S. and Leong M. S. (2002) "Small dual-frequency microstrip antennas", IEEE Trans. on Vehicular Technology, Vol. 51, No.1, pp 28-36.
8. Gao S. C., Li L. W., Yeo T. S., and Leong M. S. (2001), "A dual-frequency compact microstrip patch antenna", Radio Science, Vol. 36, NO. 6, pp 1669-1682.
9. Gao S. C., Li L.-W., Leong M.-S., and Yeo T.-S., (2003) "Dual-Polarized Slot-Coupled Planar Antenna With Wide Bandwidth" IEEE Transactions on Antennas and Propagation, VOL. 51, NO. 3, pp 441-448.
10. Karmakar N.C. (2002) "Investigations in to a cavity backed circular patch antenna", IEEE Trans. Antenna and Propagation, Vol. AP-50, No. 12, pp 1706-1715.
11. Lee S., Woo J., Ryu M. and Shin H. (2002) "Corrugated circular microstrip patch antennas for miniaturization", Electron. Lett., Vol.38, No. 6, pp 262-263.
12. Chen H. D. (2002) "Compact circularly polarized microstrip antenna with slotted ground plane", Electron. Letters, Vol. 38, No. 13, pp 616-617.
13. Ozgun O., Mutlu S., Aksun M. I. and Alatan L. (2003), "Design of Dual-Frequency Probe- Fed Microstrip Antennas with Genetic Optimization Algorithm" IEEE Transactions on Antennas and Propagation, Vol. 51, No. 8, pp 1947-1954
14. Chakrabarty S. B., Klefenz F., Dreher A., Sharma S. B. and Schroth A. (2003) "Dual polarized stacked SSFIP array antenna in C-band for beam-pointing" International Journal of Electronics, 2003, VOL. 90, NO. 8, 533-541.
15. Wong K. L. and Chiou T. W. (2003) "Finite Ground Plane Effects on Broad-Band Dual Polarized Patch Antenna Properties", IEEE Transactions on Antennas and Propagation, Vol. 51, No. 4, pp 903-904.
16. Gao S. C., Li L.-W., Leong M.-S., and Yeo T.-S., (2003) "Dual-Polarized Slot-Coupled Planar Antenna With Wide Bandwidth" IEEE Transactions on Antennas and Propagation, VOL. 51, NO. 3, pp 441-448.
17. Guha D. and Siddiqui J. Y. (2003) "Resonant Frequency of Circular Microstrip Antenna Covered With Dielectric Superstrate", IEEE Transactions on Antennas and Propagation, Vol. 51, No. 7, pp 1649-1652.
18. Gan Y. B., Chua C. P. and Li L. W. (2004), "An Enhanced Cavity Model For Microstrip Antennas" Microwave and Optical Technology Letters, Vol. 40, No. 6, pp 520-523.
19. Anguera J., Martínez E., Puente C., Borja C. and Soler J. (2004), "Broad-Band Dual- Frequency Microstrip Patch Antenna with Modified Sierpinski Fractal Geometry" IEEE Transactions on Antennas and Propagation, Vol. 52, No. 1, pp 66-73.
20. Kazama Y., Kumagai S. and Shiokawa T. (2005) "Vertical polarization single feed dual frequency microstrip antenna with an arc-shaped slot" IEICE Electronics Express Vol.2, No.2, 60-63, 2005.
21. Gao S. C., Li L. W. and Sambell A. (2005) "FDTD Analysis Of A Dual-Frequency Microstrip Patch Antenna", Progress In Electromagnetics Research, PIER 54, pp 155-178.
22. Chen S. Y. and Hsu P., (2005) "Broad-Band Radial Slot Antenna Fed by Coplanar Waveguide for Dual-Frequency Operation" IEEE Transactions on Antennas and Propagation, Vol. 53, No. 11, pp 3448-3452.
23. Chen Wen-Shan (2006) "A novel broadband design of a printed rectangular slot antenna for wireless applications", Microwave Journal, Vol. 49, No. 1, pp 122-130. Paul B., Mridula S., Aanandan C. K. and Mohanan.