

# **Title: “Project Scheduling: Improved approach to incorporate uncertainty using Bayesian Networks”**

“We affirm that our manuscript conforms to the submission policy of *Project Management Journal*”.

**Vahid Khodakarami**

[vahid@dcs.qmul.ac.uk](mailto:vahid@dcs.qmul.ac.uk)

PhD student in Radar (Risk Assessment and Decision Analysis Research) Group  
Department of Computer Science  
Queen Mary University of London

**Norman Fenton**

[norman@dcs.qmul.ac.uk](mailto:norman@dcs.qmul.ac.uk)

Professor of Computer Science and Head of Radar Group  
Department of Computer Science  
Queen Mary University of London

**Martin Neil**

[martin@dcs.qmul.ac.uk](mailto:martin@dcs.qmul.ac.uk)

Reader in Risk  
Department of Computer Science  
Queen Mary University of London

This paper addresses one of the most pressing open problems in project scheduling, namely how to incorporate uncertainty. Although Bayesian Networks (BNs) have recently been used to handle uncertainty in other relevant domains, the approach using BNs described here is completely novel and provides powerful analytical information for project managers.

## **Abstract**

Project scheduling inevitably involves uncertainty. The basic inputs (i.e. time, cost and resources for each activity) are not deterministic and are affected by various sources of uncertainty. Moreover, there is a causal relationship between these uncertainty sources and project parameters; this causality is not modelled in current state-of-the-art project planning techniques (such as simulation techniques). This paper introduces an approach, using Bayesian network modelling, that addresses both uncertainty and causality in project scheduling. Bayesian networks have been widely used in a range of decision-support applications, but the application to project management is novel. The model presented empowers the traditional Critical Path Method (CPM) to handle uncertainty and also provides explanatory analysis to elicit, represent, and manage different sources of uncertainty in project planning.

**Keywords:** Project scheduling; Uncertainty; Bayesian networks; CPM.

# 1 Introduction

Project planning is difficult because it inevitably involves uncertainty. Uncertainty in real-world projects arises from the following characteristics:

- *uniqueness* (no similar experience)
- *variability* (trade-off between performance measures like time, cost and quality)
- *ambiguity* (lack of clarity, lack of data, lack of structure and bias in estimates)

Many different techniques and tools have been developed to support better project scheduling, and these tools are used seriously by a large majority of project managers [Fox 1998, Pollack-Johnson 1998]. Yet, quantifying uncertainty is rarely prominent in these approaches.

This paper focuses especially on the problem of handling uncertainty in project scheduling. Section 2 elaborates on the nature of uncertainty in project scheduling and summarises the current state-of-the-art. The proposed approach is to adapt one of the best-used scheduling techniques, *Critical Path Method (CPM)* [Kelly 1961], and incorporate it into an explicit uncertainty model (using Bayesian Networks). Thus, Section 3 summarises the basic CPM methodology and notation. Section 4 presents a brief introduction to Bayesian Networks, and describes how the CPM approach can be incorporated (using a simple illustrative example). Section 5 discusses a mechanism to implement the model in real-world projects. Section 6 suggests the way forward and possible future modifications.

## 2 The nature of uncertainty in project scheduling

The project management body of knowledge [PMBOK 2004] identifies *risk management* as a key area:

‘It includes the processes concerned with identifying, analyzing, and responding to project risk. It includes maximizing the results of positive events and minimizing the consequences of adverse events’.

Central to risk management is the issue of handling *uncertainty*. [Ward and Chapman 2003] argue that current project risk management processes induce a restricted focus on managing project uncertainty. They believe it is because the term ‘risk’ has become associated with ‘events’ rather than more general sources of significant uncertainty.

In different project management processes there are different aspects of uncertainty. The focus of this paper is on uncertainty in project scheduling. The most obvious area of uncertainty here is in estimating duration for a particular activity. Difficulty in this estimation arises from a lack of knowledge of what is involved rather than from the uncertain consequences of potential threats or opportunities. This uncertainty arises from one or more of the following:

- Level of available and required resource
- Trade-off between resources and time
- Possible occurrence of uncertain events (i.e. risks)
- Causal factors and inter-dependencies between them including common causal factors that affect more than one activity (such as organizational issues)

- Lack of previous experience and use of subjective rather than objective data
- Incomplete or imprecise data or lack of data at all
- Uncertainty about the basis of subjective estimation (i.e. Bias in estimation)

The best-known technique to support project scheduling is the *Critical Path Method (CPM)* (described in detail in Section 3). This technique, which is adapted by the most widely used project management software tools, is purely deterministic. It makes no attempt to handle or quantify uncertainty. However, a number of techniques such as *Program Evaluation and Review Technique (PERT)*, *Critical Chain Scheduling (CCS)* and *Monte Carlo Simulation (MCS)* do as follows:

- *PERT* [Malcom et al 1959, Miller 1962, Moder 1988] incorporates uncertainty in a restricted sense, by using a probability distribution for each task. Instead of having a single deterministic value, three different estimates (pessimistic, optimistic and most likely) are approximated. Then the ‘critical path’ and the start and finish date are calculated by use of distributions’ means and applying probability rules. Results in PERT are more realistic than CPM but PERT does not address explicitly any of the sources of uncertainty listed above.
- Critical Chain (CC) Scheduling is based on Goldratt’s Theory of Constraints (TOC) [Goldratt 1997]. For minimizing the impact of Parkinson’s Law (jobs expand to fill the allocated time), CC uses a 50% confidence interval for each task in project scheduling. The safety time (remaining 50%) associated with each task is shifted to the end of the critical chain (longest chain) to form the

project buffer. Although it is claimed that the CC approach is the most important breakthrough in project management history, its over-simplicity is a concern for many companies who do not understand both the strength and weakness of CC and apply it regardless of their particular and unique circumstances [Pinto 1999]. The assumption that all task durations are overestimated by a certain factor is questionable and the main issue is: How does the project manager determine the safety time? [Raz et al 2003]. CC relies on a fixed, right-skewed probability for activities, that may be inappropriate [Herroelen 2001] and a sound estimation of project and activity duration (and consequently the buffer size) is still essential [Trietsch 2005].

- *Monte Carlo Simulation* (MCS) was first proposed for project scheduling in the early 1960s [Van Slyke 1963] and implemented in the 1980s [Fishman 1986]. In the 1990s because of improvements in computer technology, MCS rapidly became the dominant technique for handling uncertainty in project scheduling [Cook 2001]. A survey by the Project Management Institute [PMI 1999] showed that nearly 20% of project management software packages support MCS. For example, *PertMaster* [PertMaster 2006] accepts scheduling data from tools like *MS-Project* and *Primavera* and incorporates MCS to provide project risk analysis in time and cost. However, the Monte Carlo approach has attracted some criticism. [Van Dorp and Duffey 1999] explain the weakness of Monte Carlo simulation, in assuming statistical independence of activity duration in a project network. Moreover, being event-oriented (assuming project risks as ‘independent events’), MCS and the tools that implement it do not identify the sources of uncertainty.

As argued in [Ward and Chapman 2003] managing uncertainty in projects is not just about managing perceived threats, opportunities and their implication. A proper uncertainty management provides: identifying various sources of uncertainty, understanding the origins of them, and then managing them to deal with desirable or undesirable implications.

Capturing uncertainty in projects ‘needs to go beyond variability and available data. It needs to address ambiguity and incorporate structure and knowledge’ [Chapman and Wards 2000]. In order to measure and analyse uncertainty properly, we need to model relations between trigger (source), risk and impacts (consequences). Because projects are usually one-off experiences, their uncertainty is *epistemic* (i.e. related to a lack of complete knowledge) rather than *aleatoric* (i.e. related to randomness). The duration of a task is uncertain because there is no similar experience before, so data is incomplete and suffers from imprecision and inaccuracy. The Estimation of this sort of uncertainty is mostly subjective and based on estimator judgment. Any estimation is conditionally dependent on some assumptions and conditions even if they are not mentioned explicitly. These assumptions and conditions are major sources of uncertainty and need to be addressed and handled explicitly.

The most well established approach to handling uncertainty in these circumstances is Bayesian approach [Goldstein 2006, Efron 2004]. Where complex causal relationship are involved, the Bayesian approach is extended by using of Bayesian Networks. The challenge is to incorporate the CPM approach into Bayesian Networks..

### 3 CPM methodology and notation

CPM [Moder 1988] is a deterministic technique that, by use of a network of dependencies between tasks and given deterministic values for task durations, calculates the longest path in the network called the 'critical path'. The length of the 'Critical Path' is the earliest time for project completion. The critical path can be identified by determining the following parameters for each activity:

*D* - Duration

*ES* - earliest start time

*EF* - earliest finish time

*LF* - latest finish time

*LS* - latest start time

The earliest start and finish times of each activity are determined by working forward through the network and determining the earliest time at which an activity can start and finish considering its predecessor activities. For each activity *j*:

$$ES_j = \text{Max} [ES_i + D_i ; \text{over predecessor activities } i]$$

$$EF_j = ES_j + D_j$$

The latest start and finish times are the latest times that an activity can start and finish without delaying the project and are found by working backward through the network. For each activity *i*:

$$LF_i = \text{Min} [LF_j - D_j ; \text{over successor activities } j]$$

$$LS_i = LF_i - D_i$$

The activity's 'Total Float' (TF) (i.e. the amount that the activity's duration can be increased without increasing the overall project completion time) is the difference in the latest and earliest finish of each activity. A critical activity is one with no TF and should receive special attention (delay in a critical activity will delay the whole project). The critical path then is the path(s) through the network whose activities' have minimal TF.

The CPM approach is very simple and provides very useful and fundamental information about a project and its activities' schedule. However, because of its' single point estimate assumption it is too simplistic to be used in real complex projects. The challenge is to incorporate the inevitable uncertainty.

## **4 Proposed BN solution**

*Bayesian Networks* (BNs) are recognised as a mature formalism for handling causality and uncertainty [Heckerman et al 1995]. This section provides a brief overview of BNs and describes a new approach for scheduling project activities in which CPM parameters (i.e. ES, EF, LS and LF) are determined in a BN.

### **4.1 Bayesian Networks: An overview**

Bayesian Networks (also known as Belief Networks, Causal Probabilistic Networks, Causal Nets, Graphical Probability Networks, Probabilistic Cause-Effect Models, and Probabilistic Influence Diagrams) provide decision-support for a wide range of problems involving uncertainty and probabilistic reasoning. Examples of real-world applications can be found in [Heckerman et al 1995, Fenton et al 2002, Neil et al 2001]. A BN is a directed graph, together with an associated set of probability tables.

The graph consists of nodes and arcs. Figure 1 shows a very simple BN that models the cause of delay in a particular task in a project. The nodes represent uncertain variables, which may or may not be observable. Each node has a set of states (e.g. ‘on time’ and ‘late’ for ‘Sub-contract’ node). The arcs represent causal or influential relationships between variables. (e.g. ‘Sub-contract’ and ‘Staff Experience’ may cause ‘Delay in Task’). There is a probability table for each node, providing the probabilities of each state of the variable. For variables without parents (called ‘prior’ nodes) the table just contains the marginal probabilities. (e.g. for ‘Sub-contract’ node  $P(\text{‘On-time’})=0.95$  and  $P(\text{‘late’})=0.05$ ). This is also called ‘prior distribution’ that represents the prior belief (state of knowledge) about the variable. For each variable with parents, the probability table has conditional probabilities for each combination of the parents states (see, for example, the probability table for ‘Delay in Task’ in Figure 1). This is also called ‘likelihood function’ that represents how likely is a state of a variable given a particular states of its parent.

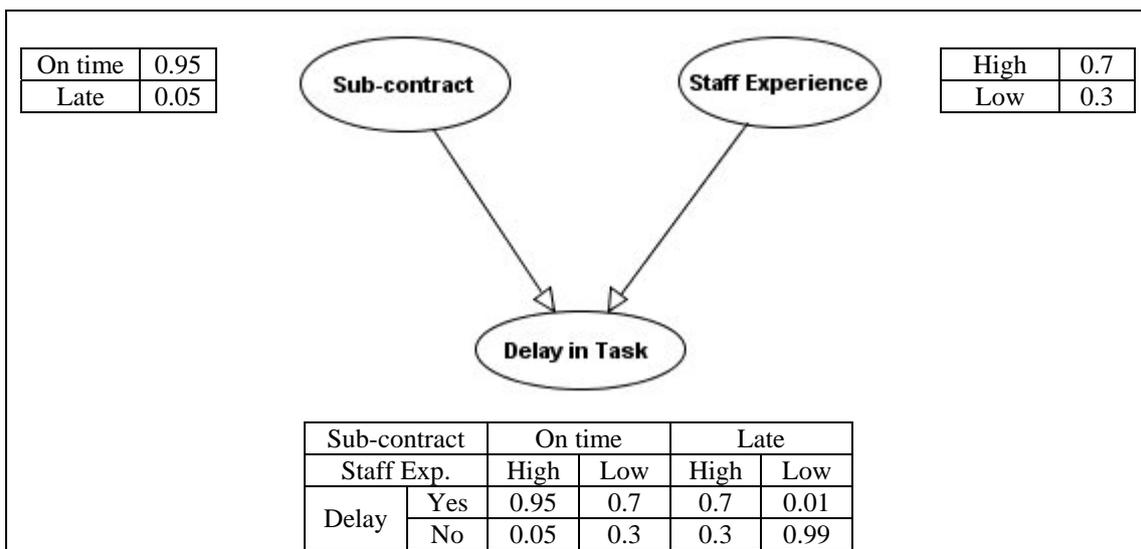


Figure 1 A Bayesian Network contains nodes, arcs and probability table

The main use of BNs is in situations that require statistical inference. In addition to statements about the probabilities of events, the user knows some *evidence* (i.e. some variable states or events that have actually been observed), and wishes to infer the probabilities of other variables, which have not as yet been observed. These observed values represent a posterior probability, and by applying *Bayes* rule in each affected node, they can influence other BN nodes via propagation, modifying the probability distributions. For example, the probability that the task finishes on time, with no observation, is 0.855 (Figure 2a). However if we know that the sub-contractor has failed to deliver on time, this probability updates to 0.49 (Figure 2b).

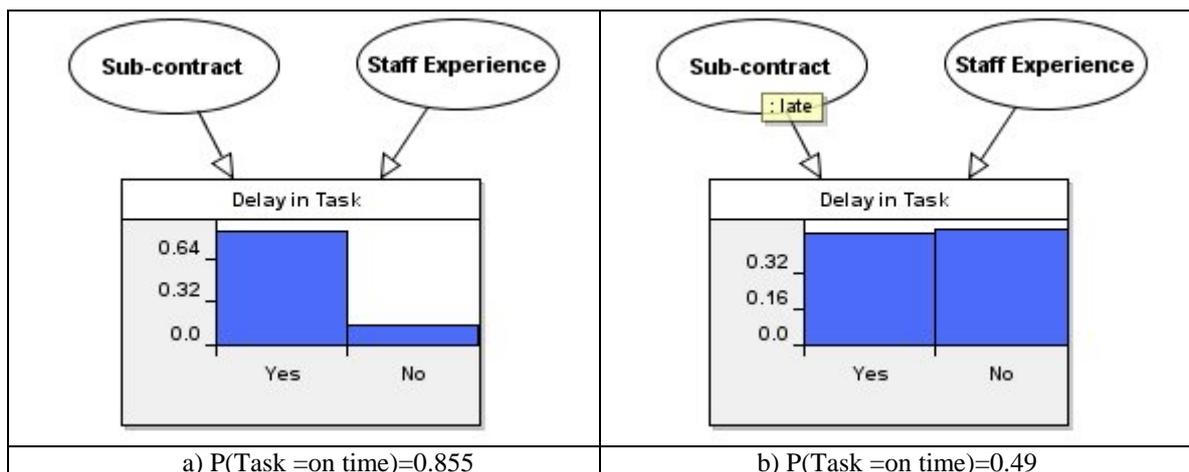


Figure 2 New evidence updates the probability

The key benefits of BNs that make them highly suitable for the project planning domain are that they:

- Explicitly quantify uncertainty and model the causal relation between variables
- Enable reasoning from effect to cause as well as from cause to effect (propagation is both 'forward' and 'backward')
- Make it possible to overturn previous beliefs in the light of new data
- Make predictions with incomplete data
- Combine subjective and objective data

- Enable users to arrive at decisions that are based on visible auditable reasoning

BNs, as a tool for decision support, have been deployed in domains ranging from medicine to politics. BNs potentially address many of the ‘uncertainty’ issues raised in Section 2. In particular, incorporating CPM-style scheduling into a BN framework makes it possible to properly handle uncertainty in project scheduling.

There are numerous commercial tools that enable users to build BN models and run the propagation calculations. With such tools it is possible to perform fast propagation in large BNs (with hundreds of nodes). In this work we have used [AgenaRisk 2006], which is especially well-suited to this kind of application because it is the only BN tool that can properly handle continuous variables (as opposed to just discrete).

#### 4.2 *BN for Activity Duration*

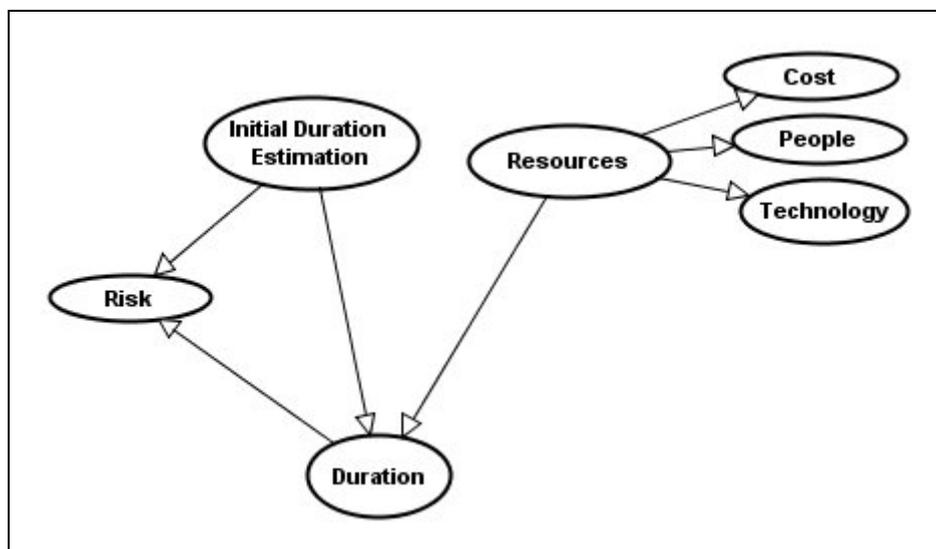


Figure 3 Bayesian Network for Activity Duration

Figure 3 shows a prototype BN that we have built to model uncertainty sources and their affects on duration of a particular activity. The model contains variables that

capture the uncertain nature of activity duration. 'Initial Duration Estimation' is the first estimation of the activity's duration; it is estimated based on historical data, previous experience or simply expert judgement. 'Resources' incorporates any affecting factor that can increase or decrease the activity duration. It is a ranked node, which for simplicity here is restricted to three levels: low, average and high. The level of resources can be inferred from so called 'indicator' nodes. Hence, the causal link is from the 'resources' to directly observable indicator values like the 'cost', the experience of available 'people' and the level of available 'technology'. There are many alternative indicators. An important and novel aspect of this approach is to allow the model to be adapted to use whichever indicators are available.

The power of this model is better understood by showing the results of running it under various scenarios. It is possible to enter observations anywhere in the model to perform not just predictions but also many types of trade-off and explanatory analysis. So, for example, we can enter observations for 'Initial Duration Estimation' and 'Resources' and let the model show the distributions for 'duration'. Figure 4 shows how the distribution of the activity duration whose initial estimation is five days, changes when the level of its available resources changes from 'Low' to 'High'. (All the subsequent figures are outputs from the AgenaRisk software).

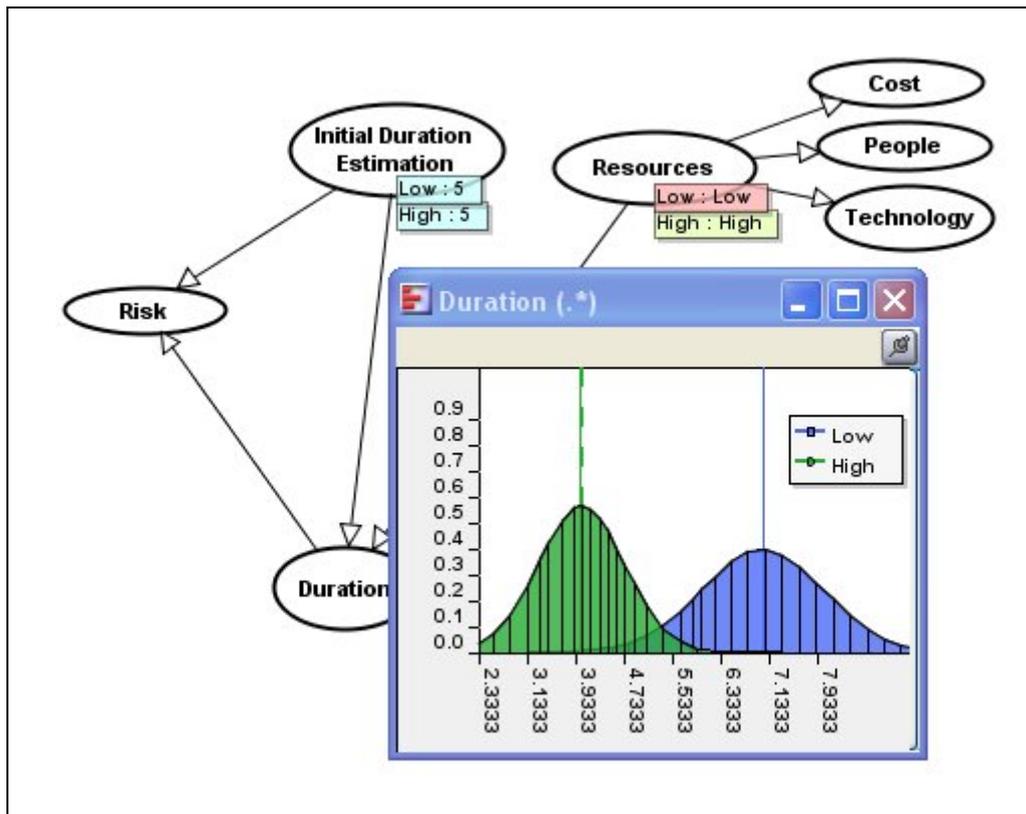


Figure 4 Probability distribution for 'Duration' (days) changes when the level of 'Resources' changes

Another possible analysis in this model is the trade-off analysis between 'Duration' and 'Resources' when there is a time constraint for activity duration and we are interested to know about the level of required resource. For example, consider an activity whose initial duration is estimated as five days but which must be finished in three days. Figure 5 shows the probability distribution of required resources to meet this duration constraint. Note how it is highly skewed toward 'high'.

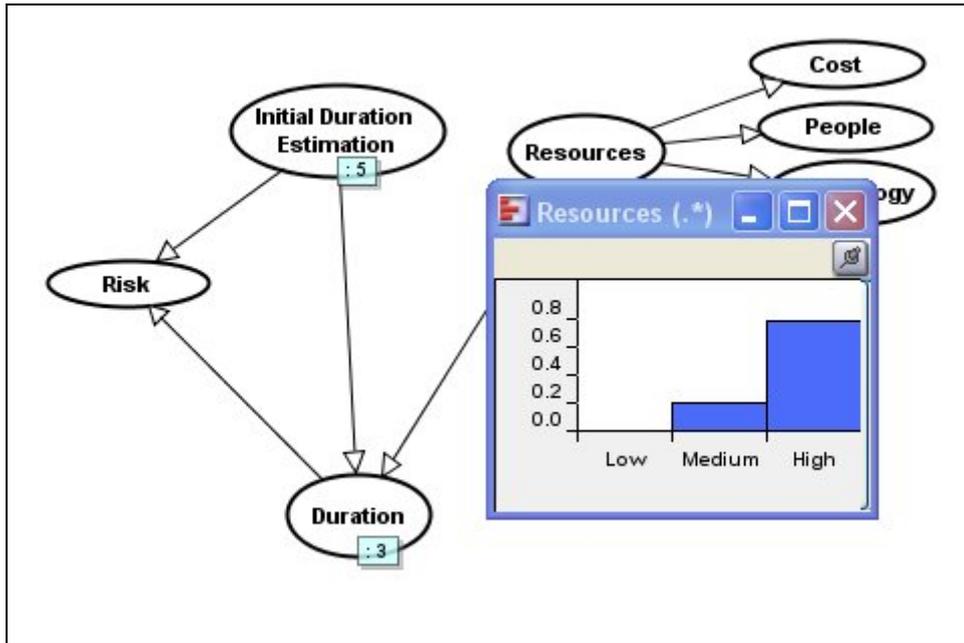


Figure 5 Level of required 'Resources' when there is a constraint on 'Duration'

### 4.3 Mapping CPM to BN

As described in Section 3, the main components of CPM networks are *activities*. Activities are linked together to represent dependencies. In order to map a CPM network to a BN we first need to map a single activity. Each of the activity parameters identified in Section 3 are represented as a variable (node) in the BN.

Figure 6 shows a schematic model of the BN fragment associated with an activity. It clearly shows the relation between the activity parameters and also the relation with predecessor and successor activities.

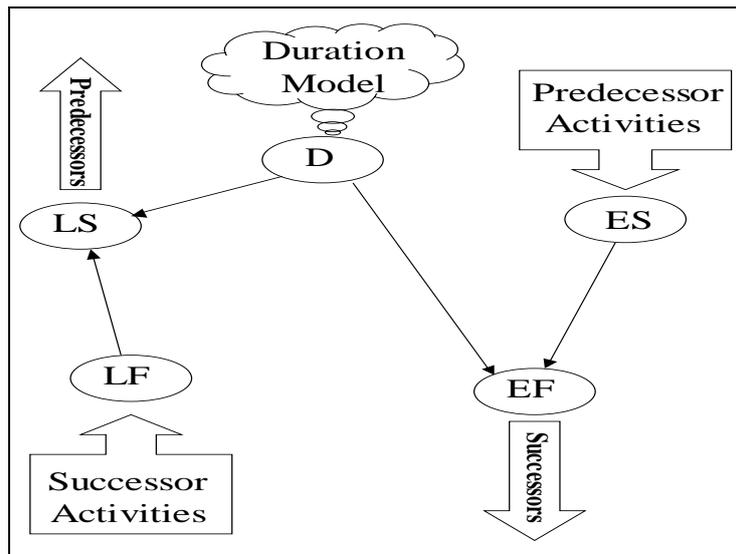


Figure 6 Schematic of BN for an activity

The next step is to define the connecting link between dependent activities. The forward pass method in CPM is mapped as a link between EF of each activity to ES of the successor activities. The backward pass method in CPM is mapped as a link between LS of each activity to LF of the predecessor activities.

#### 4.4 Example

The following illustrates this mapping process. The example is deliberately very simple to avoid extra complexity in the BN. How the approach can be used in real-size projects is discussed in section 5.

Consider a small project with five activities A, B, C, D and E. The *Activity on Arc* (AOA) network of the project is shown in Figure 7.

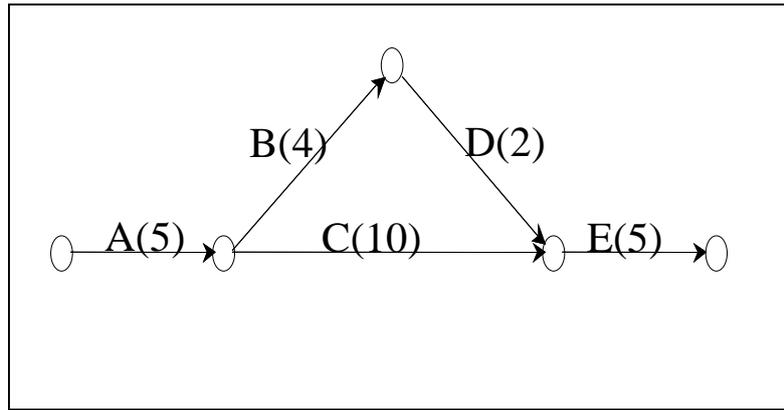


Figure 7 CPM network

The results of the CPM calculation is summarized in Table 1. Activities A, C and E with TF=0 are critical and the overall project takes 20 days (i.e. earliest finish of 'E').

Activity	D	ES	EF	LS	LF	TF
A	5	0	5	0	5	0
B	4	5	9	9	13	4
C	10	5	15	5	15	0
D	2	9	11	13	15	4
E	5	15	20	15	20	0

Table 1 Activities' time (days) and summary of CPM calculations

Figure 8 shows the full BN representation of the above example. Each activity has 5 associated nodes. Forward pass calculation of CPM is done through connection between ES and EF. Activity 'A', the first activity of the project, has no predecessor, so its ES is set to zero. 'A' is predecessor for 'B' and 'C' so EF of 'A' is linked to ES of 'B' and 'C'. EF of 'B' is linked to ES of its successor, 'D'. And finally EF of 'C' and 'D' are connected to ES of 'E'. In fact ES of 'E' is the maximum of EF of 'C' and 'D'. EF of 'E' is the earliest time for project completion time.

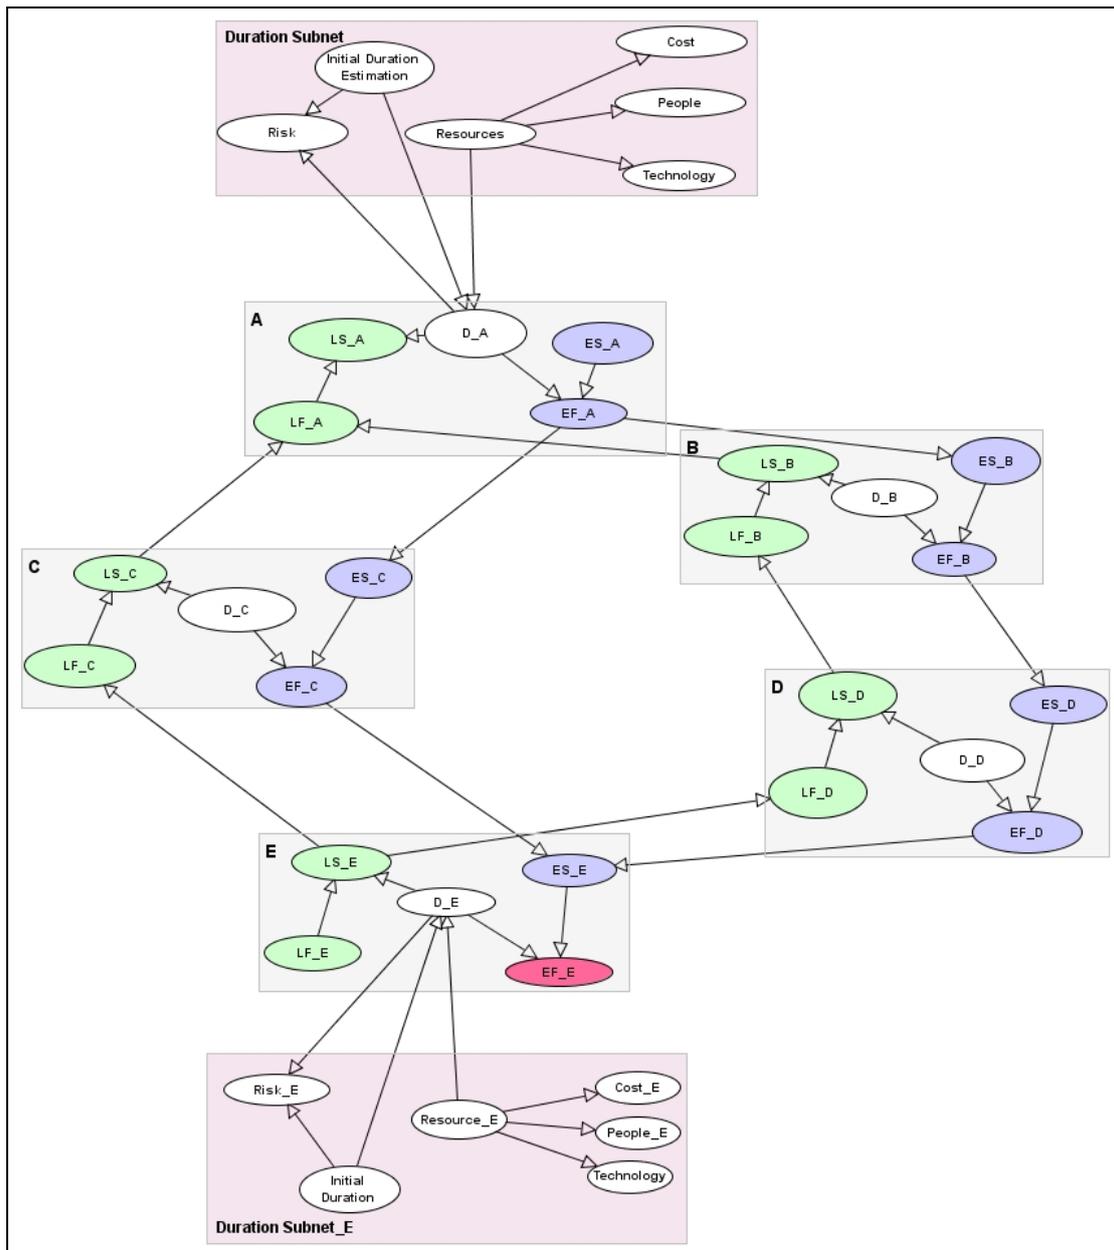


Figure 8 Overview of BN for example (1)

The same approach is used for backward CPM calculation connecting LF and LS. Activity 'E' is the last activity of the project and has no successor, so its LF is set to EF. 'E' is successor of 'C' and 'D' so LS of 'E' is linked to LF of 'C' and 'D'. LS of 'D' is linked to LF of its predecessor 'B'. And finally LS of 'B' and 'C' are linked to LF of 'A'. LF of 'A' is the minimum of LS of 'B' and 'C'.

For simplicity in this example, it is assumed that activities ‘A’ and ‘E’ are more risky and need more detailed analysis. For all other activities the uncertainty about ‘duration’ is expressed simply by a normal distribution.

#### 4.5 Results

This section explores different scenarios of the BN model in Figure 8. The main objective is to predict project completion time (i.e. the earliest finish of E) in such a way that it fully characterises uncertainty.

Suppose the initial estimation of activities’ duration is the same as Table 1. Suppose the resource level for ‘A’ and ‘E’ is ‘medium’. If the earliest start of ‘A’ is set to zero, the distribution for project completion is shown in Figure 9a. The distribution’s mean is 20 days as was expected from the CPM analysis. However, unlike CPM the prediction is not a single point and its variance is 4. Figure 9b illustrates the cumulative distribution of finishing time, which shows the probability of completing the project before a given time. For example, with probability of 90% the project will finish in 22 days.

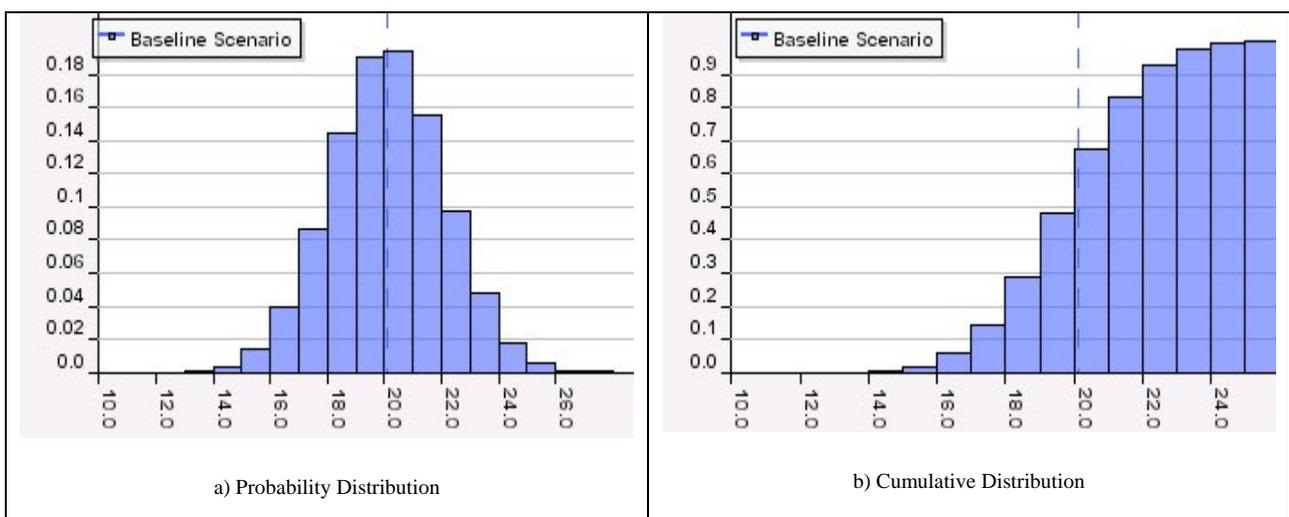


Figure 9 Distribution of project completion (days) for main Scenario in example (1)

In addition to this baseline scenario, by entering various evidence (observations) to the model, it is possible to analyse the project schedule from different aspects. For example, one scenario is to see how changing the resource level affects the project completion time.

Figure 10 compares the distributions for project completion time as the level of people’s experience changes. When the experience of people changes from ‘low’ to ‘high’ the mean of finishing time changes from 22.7 days to 19.5 days and the 90% confidence interval changes from 26.3 days to 22.9 days.

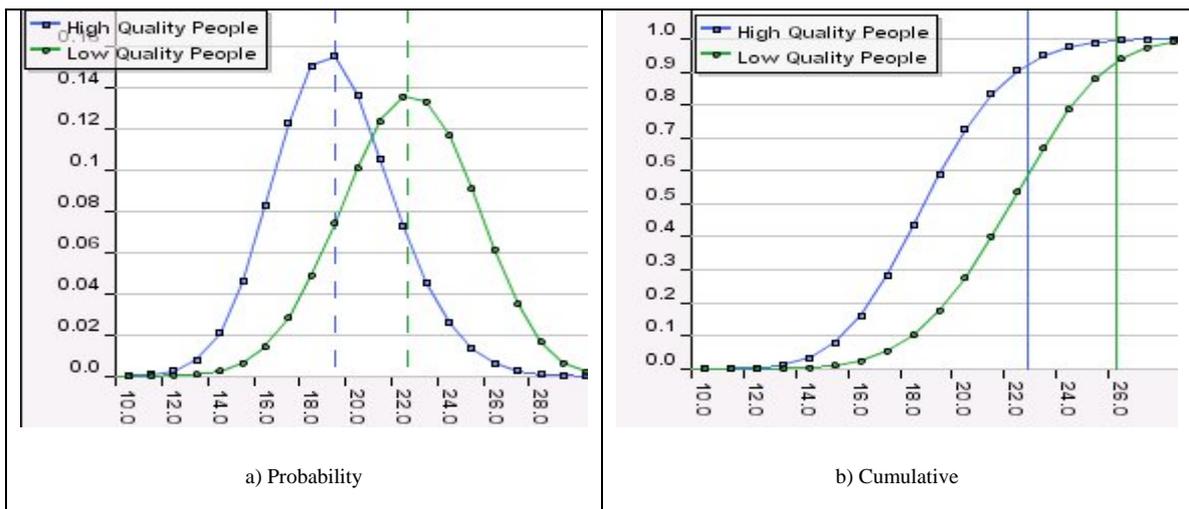


Figure 10 Change in project time distribution (days) when level of people’s experience changes

Another useful analysis is when there is a constraint on project completion time and we want to know how much resource is needed. Figure 11 illustrates this trade-off between project time and required resources. If the project needs to be completed in 18 days (instead of the baseline 20 days) then the resource required for ‘A’ most likely must be ‘high’; if the project completion is set to 22, the resource level for ‘A’ moves significantly in the direction of ‘low’.

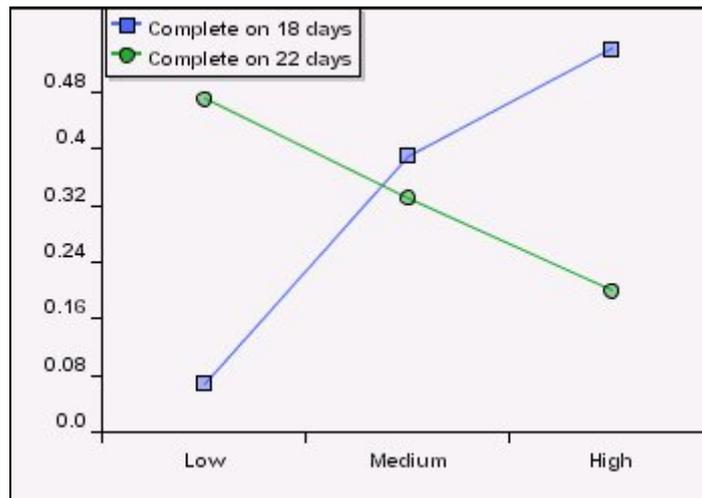


Figure 11 Probability of required resource changes when the time constraint changes

The next scenario investigates the impact of risk in activity ‘A’ on the project completion time as it is shown in Figure 12. When there is a risk in activity ‘A’, the mean of the distribution for project completion time changes from 19.9 to 22.6 and the 90% confidence interval changes from 22.5 days to 25.3 days.

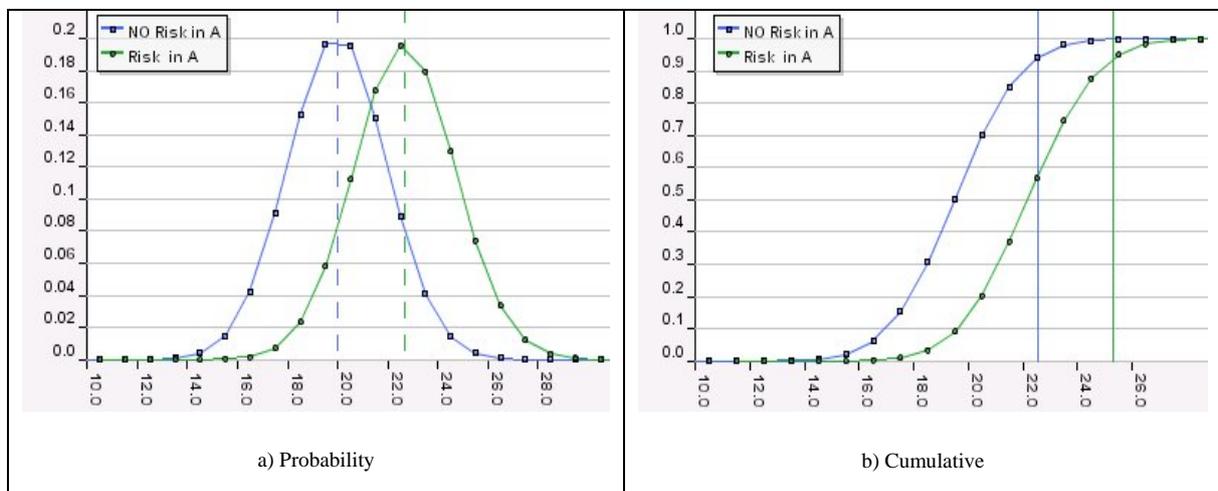


Figure 12 The impact of occurring risk in activity A on the project completion time

One of important advantage of BNs is their potential for parameter learning, which is shown in the next scenario. Imagine activity ‘A’ *actually* finishes in 7 days even

though it was originally estimated as 5 days. Because activity ‘A’ has taken more time than it was expected, the level of resources has probably not been sufficient.

By entering this observation the model gives the probability of resource for activity ‘A’ as illustrated in Figure 13. This can update our belief about the *actual* level of available resources.

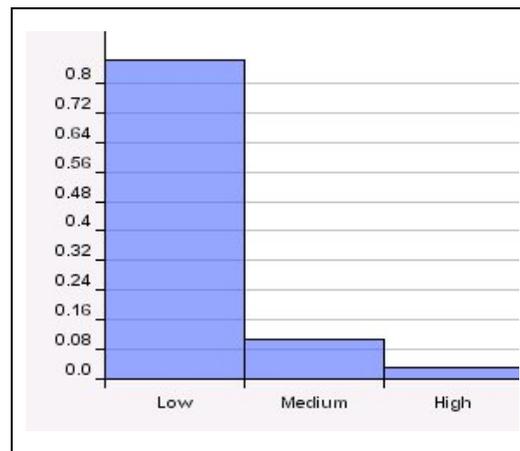


Figure 13 Learnt Probability Distribution ‘Resource’ when the actual duration is 7 days

Assuming both activities ‘A’ and ‘E’ use the same resources (e.g. people), the updated knowledge about the level of available resource from ‘A’ (which is finished) can be entered as evidence in ‘Resource’ for activity ‘E’ (which is not started yet) and consequently updates the project completion time.

Figure 14 shows the distributions of completion time when the level of available resource of ‘E’ is learned from the actual duration of activity ‘A’.

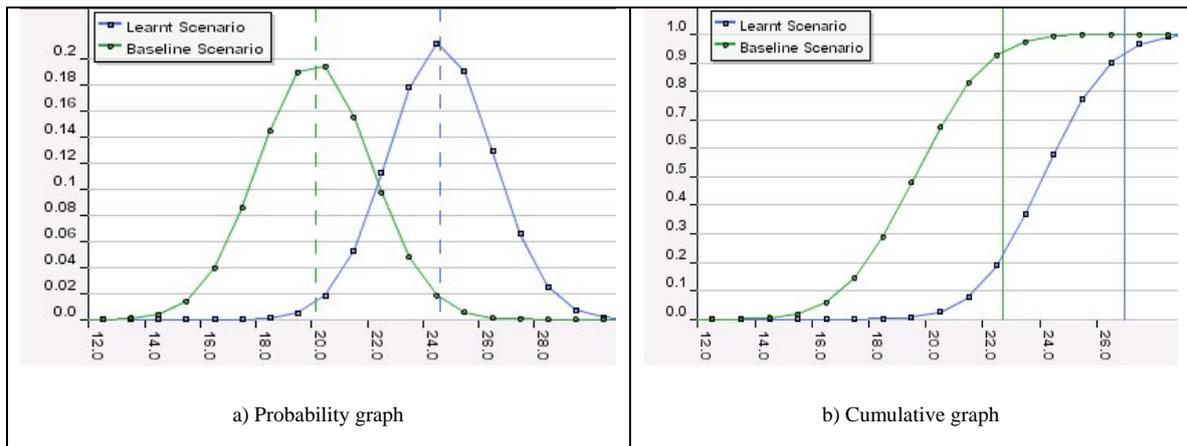


Figure 14 completion time (days) based on learned parameters compare with baseline scenario

Another application of parameter learning in these models is the ability to incorporate and learn about bias in estimation. So if there are several observations in which actual task completion times are underestimated the model learns that this may be due to bias rather than unforeseen risks and this information will inform subsequent predictions. Work on this type of application (called ‘Dynamic Learning’), is still in progress and can be a possible way of extending the BN version of CPM.

## 5 Object Oriented Bayesian Network (OOBN)

It is clear from Figure 8 that even simple CPM networks leads to a fairly large BNs. In real-sized projects with several activities, constructing the network needs a huge effort, which is not effective especially for users without much experience in BNs. However, this complexity can be handled using the so-called Object Oriented Bayesian Network (OOBN) approach [Koller and Pfeffer 1997]. This approach, analogous to the Object-oriented programming languages, supports a natural framework for abstraction and refinement, which allows complex domains to be described in terms of inter-related objects.

The basic element in OOBN is an object; an entity with identity, state and behavior. An object has some set of attributes each of which is an object. Each object is assigned to a *class*. Classes provide the ability to describe a general, reusable network that can be used in different instances. A class in OOBN is a BN fragment.

The proposed model has a highly repetitive structure and fits the Object Oriented framework perfectly. The internal parts of the activity subnet (Figure 6) are encapsulated within the activity class as shown in Figure 15.

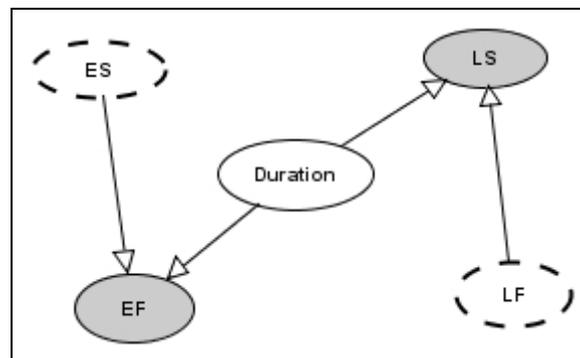


Figure 15 Activity class encapsulates internal parts of network

Classes can be used as libraries and combined into a model as needed. By connecting inter-related objects, complex network with several dozen nodes can be constructed easily. Figure 16 shows the OOBN model for the example presented in section 4.4.

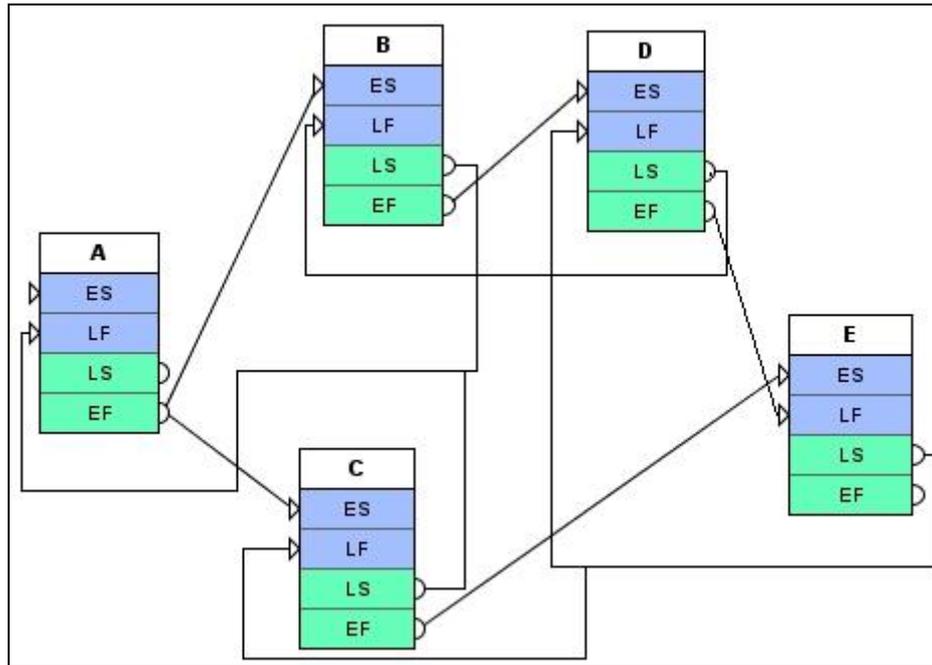


Figure 16 OO model for the presented example

The OOBN approach can also significantly improve the performance of inference in the model. Although a full discussion of the OOBN approach to this particular problem is beyond the scope of this paper, the key point to note is that there is an existing mechanism (and implementation of it) that enables the proposed solution to be genuinely ‘scaled-up’ to real-world projects. Moreover, AgenaRisk is one of the few BN tools that implements the OOBN solution and research is emerging [Agena 2006] to develop the new generation of BNs tools that support OOBN concept both in constructing large-scale models and also in propagation aspects.

## 6 Conclusions and way forward

Handling risk and uncertainty is increasingly seen as a crucial component of project management and planning. One classic problem is how to incorporate uncertainty in project scheduling. Despite the availability of different approaches and tools, the

dilemma is still challenging. Most current techniques for handling risk and uncertainty in project scheduling (simulation based techniques) are often event-oriented and try to model the impact of possible ‘threats’ on project performance. They ignore the source of uncertainty and the causal relations between project parameters. More advanced techniques are required to capture different aspects of uncertainty in projects.

This paper has proposed a new approach that makes it possible to incorporate risk, uncertainty and causality in project scheduling. Specifically, we have shown how a Bayesian Network model can be generated from a project’s CPM network. Part of this process is automatic and part involves identifying specific risks (which may be common to many activities) and resource indicators. The approach brings the full weight and power of BN analysis to bear on the problem of project scheduling. This makes it possible to:

- Capture different sources of uncertainty and use them to inform project scheduling.
- Express uncertainty about completion time for each activity and the whole project with full probability distributions
- Model the ‘trade-off’ between ‘time’ and ‘resources’ in project activities
- Use ‘what-if?’ analysis for finding the level of required resources given constraints like, for example, a specific completion time
- Learn from data so that predictions become more relevant and accurate

The application of the approach was explained by use of a simple example. In order to scale this up to real projects with many activities the approach must be extended to

use the so-called Object Oriented BNs. There is ongoing work to accommodate such object oriented modelling so that building a BN version of CPM is just as simple as building a basic CPM model.

Other extensions to the work described here include:

- Incorporating additional uncertainty sources in the duration network
- Handling dynamic parameter learning as more information becomes available when project progresses
- Handling common causal risks which affect more than one activity
- Handling management action when the project is behind its plan

## **7 References**

AgenaRisk, [www.agenarisk.com](http://www.agenarisk.com), 2006

Chapman C and Ward, "Estimation and evaluation of uncertainty: a minimalist first pass approach", *International Journal of Project Management*, Vol. 18, 369-383, 2000.

Cook M. S, "Real-world Monte Carlo Analysis", *Proceeding of PMI Annual Seminars and Symposium*, Nashville, 2001.

Efron B, "Bayesians, Frequentists, and Scientists", Journal of the American Statistical Association. Vol. 100, No. 469, 1-5, 2004.

Fenton NE, Krause P, Neil M, "Software Measurement: Uncertainty and Causal Modelling", IEEE Software 10(4), 116-122, 2002.

Fishman GS, "A Monte Carlo sampling plan for estimating network reliability", Operations Research, Vol. 34(4), 581-594, 1986.

Fox T L, Spence J W, "Tools of the trade: A survey of project management tools", Project Management Journal, Vol. 29, 20-28, 1998.

Goldstein M, "Subjective Bayesian Analysis: Principle and practice2", Bayesian Analysis, Vol. 1, No. 3, p403-420, 2006.

Goldratt E.M, "Critical Chain", The North River Press Publishing Corporation, Great Barrington, 1997.

Heckerman D, Mamdani A, Wellman M, "Real-world applications of Bayesian networks", Comm ACM, 38(3), 25-26, 1995.

Herroelen W, Leus R, "On the merits and pitfalls of critical chain scheduling", Journal of Operations Management; Vol. 19, 559-577, 2001.

Kelly J. E, "Critical path planning and scheduling mathematical bases", Operations Research; Vol. 9, 246-320, 1961.

Koller D, Pfeffer A, "Object-Oriented Bayesian Networks", In D. Geiger and P. Shenoy, editors, Proceeding of the Thirteenth annual Conference on Uncertainty in Artificial Intelligence (UAI-97), San Francisco, California, 302-313. Morgan Kaufman Publishers, August 1997.

Malcolm DG, Roseboom J H, Clark C E and Fazer W, "Application of a technique for research and development program evaluation", Operations Research, 7(5), 646-669, 1959.

Miller R. W., "How to plan and control with PERT", Harvard Business Review, 93-104, 1962.

Moder J, "Network techniques in project management", Project Management Handbook, 2<sup>nd</sup> Edition, New York: Van Nostrand Reinhold, 324-373, 1988.

Neil M, Fenton N, Forey S and Harris R, "Using Bayesian Belief Networks to Predict the Reliability of Military Vehicles", IEE Computing and Control Engineering J 12(1), 11-20, 2001.

Pinto J K, "Some constraints on the theory of constraints: Taking a critical look at the Critical Chain", PM Network, Vol. 13(8), 49-51, 1999.

Pertmaster Project Risk Software, [www.pertmaster.com/products](http://www.pertmaster.com/products), 2006

PMBOK Guide."A Guide To the Project Management Body of Knowledge", Project Management Institute standard committee, 2004.

PMI, "Project management software survey", Project management Institute, 1999.

Pollack-Johnson B, "Project management software usage patterns and suggested research directions for future development", Project Management Journal, Vol. 29, 19-29, 1998.

Raz T, Barnes R and Dvir D, "A critical look at Critical Chain Project Management", Project Management Journal, Vol. 34, 24-32, 2003.

Trietsch D, "Why Critical Path by any other name would smell less sweet?", Project Management Journal, Vol. 36, 27-36, 2005.

Van Dorp J.R, Duffey M.R., "Modelling Statistical Dependence in Risk Analysis for Project Networks", International Journal of Production Economics, Vol. 58, 17-29, 1999.

Van Slyke RM, "Monte Carlo methods and the PERT problem", Operations Research, Vol. 11(5), 839-860, 1963.

Ward S, Chapman C, "Transforming project risk management into project uncertainty management", International Journal of Project Management; Vol. 21, 97-105, 2003.