

T-coupler M12-male 5p. / 2x M12-female 4p. Replaced Art.-No. 13880

T-coupler M12 ? M12

5-pole

Distribution function (NO)

Image

Vicarious picture

Form

41121

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread M12 × 1 mm (recommended torque 0.6 Nm) self-securing
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

Commercial data


Net weight	30
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Minimum order quantity (piece)	1

Comments


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

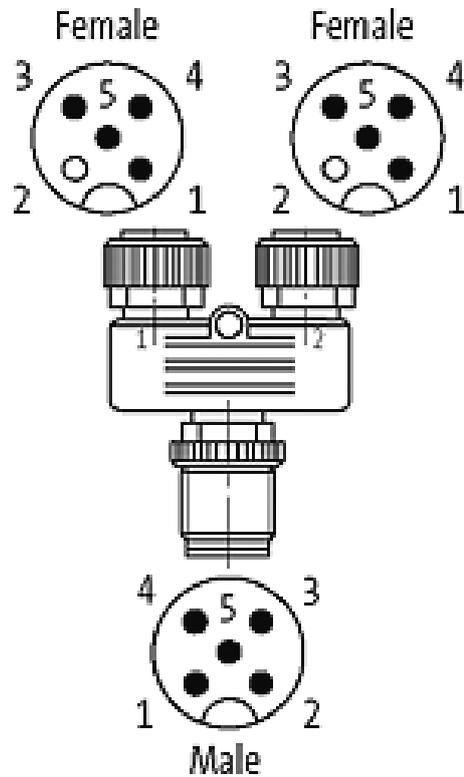

Circuit diagram

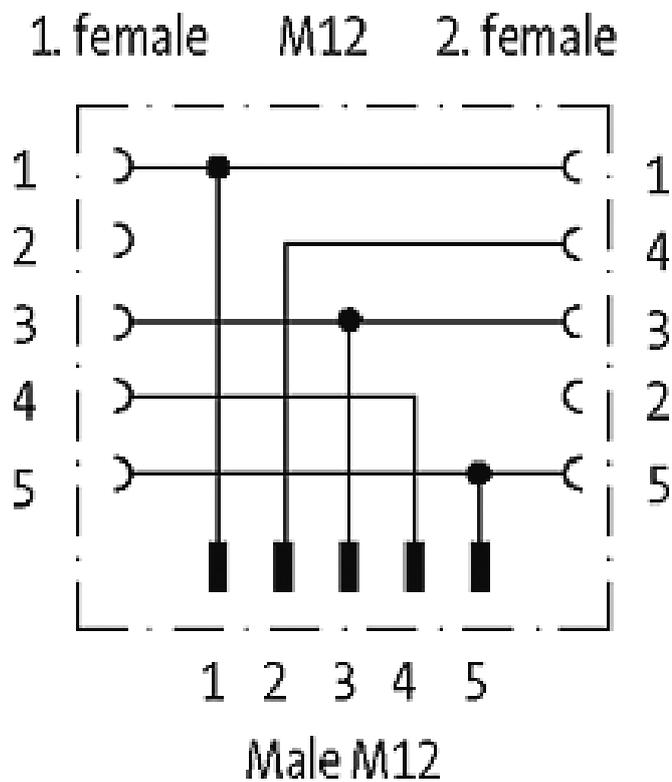

Dimension drawing

