



Python SQLite

tutorialspoint

SIMPLY EASY LEARNING

www.tutorialspoint.com



<https://www.facebook.com/tutorialspointindia>



<https://twitter.com/tutorialspoint>

About the Tutorial

Python is a general-purpose interpreted, interactive, object-oriented, and high-level programming language. It was created by Guido van Rossum during 1985-1990. Like Perl, Python source code is also available under the GNU General Public License (GPL). This tutorial gives enough understanding on Python programming language.

This tutorial explains how to communicate with SQLite database in detail, along with examples.

Audience

This tutorial is designed for python programmers who would like to understand the Python sqlite3 module in detail.

Prerequisites

Before proceeding with this tutorial, you should have a good understanding of python programming language. It is also recommended to have basic understanding of the databases — SQLite.

Copyright & Disclaimer

© Copyright 2020 by Tutorials Point (I) Pvt. Ltd.

All the content and graphics published in this e-book are the property of Tutorials Point (I) Pvt. Ltd. The user of this e-book is prohibited to reuse, retain, copy, distribute or republish any contents or a part of contents of this e-book in any manner without written consent of the publisher.

We strive to update the contents of our website and tutorials as timely and as precisely as possible, however, the contents may contain inaccuracies or errors. Tutorials Point (I) Pvt. Ltd. provides no guarantee regarding the accuracy, timeliness or completeness of our website or its contents including this tutorial. If you discover any errors on our website or in this tutorial, please notify us at contact@tutorialspoint.com

Table of Contents

About the Tutorial	ii
Audience.....	ii
Prerequisites.....	ii
Copyright & Disclaimer	ii
Table of Contents	iii
1. Python SQLite — Introduction	1
2. Python SQLite — Establishing Connection.....	4
Establishing connection using python	4
3. Python SQLite — Create Table	5
Creating a table using python.....	6
4. Python SQLite — Insert Data.....	8
Inserting data using python.....	9
5. Python SQLite — Select Data	11
Retrieving data using python.....	13
6. Python SQLite — Where Clause	15
Where clause using python	16
7. Python SQLite — Order By	18
ORDER BY clause using python.....	20
8. Python SQLite — Update Table	22
Updating existing records using python	23
9. Python SQLite — Delete Data	26
Deleting data using python	27
10. Python SQLite — Drop Table	29
Dropping a table using Python	30
11. Python SQLite — Limit	31
LIMIT clause using Python	32

12. Python SQLite — Join.....	34
Join clause using python.....	35
13. Python SQLite — Cursor Object.....	37

1. Python SQLite — Introduction

SQLite3 can be integrated with Python using sqlite3 module, which was written by Gerhard Haring. It provides an SQL interface compliant with the DB-API 2.0 specification described by PEP 249. You do not need to install this module separately because it is shipped by default along with Python version 2.5.x onwards.

To use sqlite3 module, you must first create a connection object that represents the database and then optionally you can create a cursor object, which will help you in executing all the SQL statements.

Python sqlite3 module APIs

Following are important sqlite3 module routines, which can suffice your requirement to work with SQLite database from your Python program. If you are looking for a more sophisticated application, then you can look into Python sqlite3 module's official documentation.


S.No.	API & Description
1	sqlite3.connect(database [,timeout ,other optional arguments]) This API opens a connection to the SQLite database file. You can use ":memory:" to open a database connection to a database that resides in RAM instead of on disk. If database is opened successfully, it returns a connection object.
2	connection.cursor([cursorClass]) This routine creates a cursor which will be used throughout your database programming with Python. This method accepts a single optional parameter cursorClass. If supplied, this must be a custom cursor class that extends sqlite3.Cursor.
3	cursor.execute(sql [, optional parameters]) This routine executes an SQL statement. The SQL statement may be parameterized (i. e. placeholders instead of SQL literals). The sqlite3 module supports two kinds of placeholders: question marks and named placeholders (named style). For example – cursor.execute("insert into people values (?, ?)", (who, age))
4	connection.execute(sql [, optional parameters]) This routine is a shortcut of the above execute method provided by the cursor object and it creates an intermediate cursor object by calling the cursor method, then calls the cursor's execute method with the parameters given.

5	cursor.executemany(sql, seq_of_parameters) This routine executes an SQL command against all parameter sequences or mappings found in the sequence sql.
6	connection.executemany(sql[, parameters]) This routine is a shortcut that creates an intermediate cursor object by calling the cursor method, then calls the cursor's executemany method with the parameters given.
7	cursor.executescript(sql_script) This routine executes multiple SQL statements at once provided in the form of script. It issues a COMMIT statement first, then executes the SQL script it gets as a parameter. All the SQL statements should be separated by a semi colon (;).
8	connection.executescript(sql_script) This routine is a shortcut that creates an intermediate cursor object by calling the cursor method, then calls the cursor's executescript method with the parameters given.
9	connection.total_changes() This routine returns the total number of database rows that have been modified, inserted, or deleted since the database connection was opened.
10	connection.commit() This method commits the current transaction. If you don't call this method, anything you did since the last call to commit() is not visible from other database connections.
11	connection.rollback() This method rolls back any changes to the database since the last call to commit().
12	connection.close() This method closes the database connection. Note that this does not automatically call commit(). If you just close your database connection without calling commit() first, your changes will be lost!
13	cursor.fetchone() This method fetches the next row of a query result set, returning a single sequence, or None when no more data is available.

14	cursor.fetchmany([size = cursor.arraysize]) This routine fetches the next set of rows of a query result, returning a list. An empty list is returned when no more rows are available. The method tries to fetch as many rows as indicated by the size parameter.
15	cursor.fetchall() This routine fetches all (remaining) rows of a query result, returning a list. An empty list is returned when no rows are available.

2. Python SQLite — Establishing Connection

To establish connection with SQLite Open command prompt, browse through the location of where you have installed SQLite and just execute the command **sqlite3** as shown below:

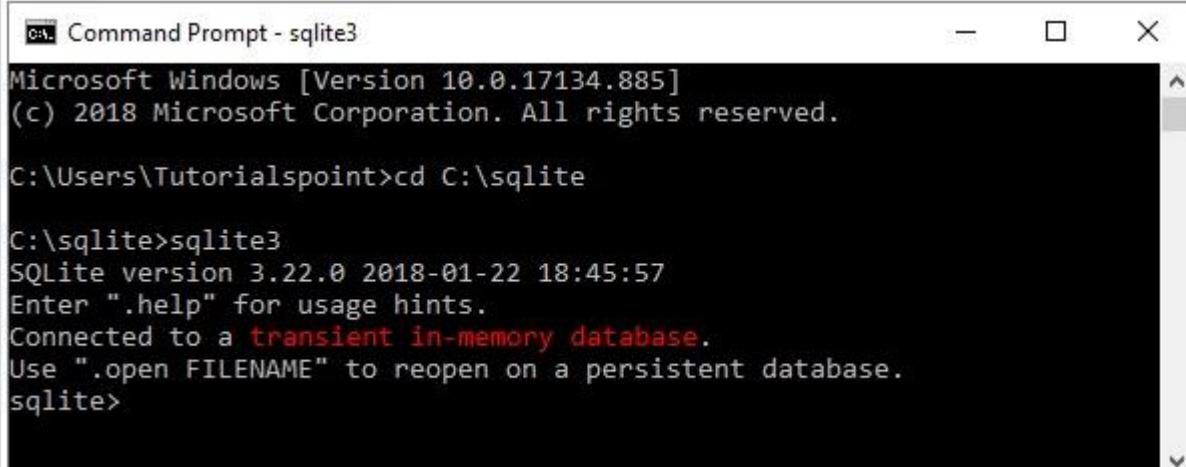

```
Command Prompt - sqlite3
Microsoft Windows [Version 10.0.17134.885]
(c) 2018 Microsoft Corporation. All rights reserved.

C:\Users\Tutorialspoint>cd C:\sqlite

C:\sqlite>sqlite3
SQLite version 3.22.0 2018-01-22 18:45:57
Enter ".help" for usage hints.
Connected to a transient in-memory database.
Use ".open FILENAME" to reopen on a persistent database.
sqlite>
```

Establishing connection using python

You can communicate with SQLite2 database using the SQLite3 python module. To do so, first of all you need to establish a connection (create a connection object).

To establish a connection with SQLite3 database using python you need to:

- Import the sqlite3 module using the import statement.
- The connect() method accepts the name of the database you need to connect with as a parameter and, returns a Connection object.

Example

```
import sqlite3
conn = sqlite3.connect('example.db')
```

Output

```
print("Connection established .....")
```

3. Python SQLite — Create Table

Using the SQLite CREATE TABLE statement you can create a table in a database.

Syntax

Following is the syntax to create a table in SQLite database:

```
CREATE TABLE database_name.table_name(  
    column1 datatype PRIMARY KEY(one or more columns),  
    column2 datatype,  
    column3 datatype,  
    ....  
    columnN datatype  
) ;
```

Example

Following SQLite query/statement creates a table with name **CRICKETERS** in SQLite database:

```
sqlite> CREATE TABLE CRICKETERS (  
        First_Name VARCHAR(255),  
        Last_Name VARCHAR(255),  
        Age int,  
        Place_Of_Birth VARCHAR(255),  
        Country VARCHAR(255)  
    );  
sqlite>
```

Let us create one more table ODIStats describing the One-day cricket statistics of each player in CRICKETERS table.

```
sqlite> CREATE TABLE ODIStats (  
        First_Name VARCHAR(255),  
        Matches INT,  
        Runs INT,  
        AVG FLOAT,  
        Centuries INT,  
        HalfCenturies INT
```

```
 );
sqlite>
```

You can get the list of tables in a database in SQLite database using the **.tables** command. After creating a table, if you can verify the list of tables you can observe the newly created table in it as:

```
sqlite> . tables
CRICKETERS      ODIStats
sqlite>
```

Creating a table using python

The Cursor object contains all the methods to execute queries and fetch data etc. The cursor method of the connection class returns a cursor object.

Therefore, to create a table in SQLite database using python:

- Establish connection with a database using the connect() method.
- Create a cursor object by invoking the cursor() method on the above created connection object.
- Now execute the CREATE TABLE statement using the execute() method of the Cursor class.

Example

Following Python program creates a table named Employee in SQLite3:

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

#Doping EMPLOYEE table if already exists.
cursor.execute("DROP TABLE IF EXISTS EMPLOYEE")
#Creating table as per requirement
sql = '''CREATE TABLE EMPLOYEE(
        FIRST_NAME  CHAR(20) NOT NULL,
        LAST_NAME  CHAR(20),
        AGE INT,
```

```
        SEX CHAR(1),  
        INCOME FLOAT)'''  
  
cursor.execute(sql)  
print("Table created successfully.....")  
  
# Commit your changes in the database  
conn.commit()  
  
#Closing the connection  
conn.close()
```

Output

```
Table created successfully.....
```

4. Python SQLite — Insert Data

You can add new rows to an existing table of SQLite using the `INSERT INTO` statement. In this, you need to specify the name of the table, column names, and values (in the same order as column names).

Syntax

Following is the recommended syntax of the `INSERT` statement:

```
INSERT INTO TABLE_NAME (column1, column2, column3,...columnN)
VALUES (value1, value2, value3,...valueN);
```

Where, `column1, column2, column3,..` are the names of the columns of a table and `value1, value2, value3,..` are the values you need to insert into the table.

Example

Assume we have created a table with name `CRICKETERS` using the `CREATE TABLE` statement as shown below:

```
sqlite> CREATE TABLE CRICKETERS (
    First_Name VARCHAR(255),
    Last_Name VARCHAR(255),
    Age int,
    Place_Of_Birth VARCHAR(255),
    Country VARCHAR(255)
);
sqlite>
```

Following PostgreSQL statement inserts a row in the above created table.

```
sqlite> insert into CRICKETERS (First_Name, Last_Name, Age, Place_Of_Birth,
Country) values('Shikhar', 'Dhawan', 33, 'Delhi', 'India');
sqlite>
```

While inserting records using the `INSERT INTO` statement, if you skip any columns names, this record will be inserted leaving empty spaces at columns which you have skipped.

```
sqlite> insert into CRICKETERS (First_Name, Last_Name, Country) values
('Jonathan', 'Trott', 'SouthAfrica');
sqlite>
```

You can also insert records into a table without specifying the column names, if the order of values you pass is same as their respective column names in the table.

```
sqlite> insert into CRICKETERS values('Kumara', 'Sangakkara', 41, 'Matale', 'Srilanka');
sqlite> insert into CRICKETERS values('Virat', 'Kohli', 30, 'Delhi', 'India');
sqlite> insert into CRICKETERS values('Rohit', 'Sharma', 32, 'Nagpur', 'India');
sqlite>
```

After inserting the records into a table you can verify its contents using the SELECT statement as shown below:

```
sqlite> select * from cricketers;
Shikhar | Dhawan      | 33 | Delhi   | India
Jonathan | Trott       |     |          | SouthAfrica
Kumara   | Sangakkara  | 41 | Matale  | Srilanka
Virat    | Kohli        | 30 | Delhi   | India
Rohit    | Sharma       | 32 | Nagpur  | India
sqlite>
```

Inserting data using python

To add records to an existing table in SQLite database:

- Import sqlite3 package.
- Create a connection object using the `connect()` method by passing the name of the database as a parameter to it.
- The **`cursor()`** method returns a cursor object using which you can communicate with SQLite3. Create a cursor object by invoking the `cursor()` object on the (above created) Connection object.
- Then, invoke the `execute()` method on the cursor object, by passing an INSERT statement as a parameter to it.

Example

Following python example inserts records into to a table named EMPLOYEE:

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

# Preparing SQL queries to INSERT a record into the database.
```

```
cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
INCOME) VALUES ('Ramya', 'Rama Priya', 27, 'F', 9000)''')

cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
INCOME) VALUES ('Vinay', 'Battacharya', 20, 'M', 6000)''')

cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
INCOME) VALUES ('Sharukh', 'Sheik', 25, 'M', 8300)''')

cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
INCOME) VALUES ('Sarmista', 'Sharma', 26, 'F', 10000)''')

cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
INCOME) VALUES ('Triphthi', 'Mishra', 24, 'F', 6000)''')

# Commit your changes in the database
conn.commit()

print("Records inserted.....")

# Closing the connection
conn.close()
```

Output

```
Records inserted.....
```

5. Python SQLite — Select Data

You can retrieve data from an SQLite table using the SELCT query. This query/statement returns contents of the specified relation (table) in tabular form and it is called as result-set.

Syntax

Following is the syntax of the SELECT statement in SQLite:

```
SELECT column1, column2, columnN FROM table_name;
```

Example

Assume we have created a table with name CRICKETERS using the following query:

```
sqlite> CREATE TABLE CRICKETERS (
    First_Name VARCHAR(255),
    Last_Name VARCHAR(255),
    Age int,
    Place_Of_Birth VARCHAR(255),
    Country VARCHAR(255)
);
sqlite>
```

And if we have inserted 5 records in to it using INSERT statements as:

```
sqlite> insert into CRICKETERS values('Shikhar', 'Dhawan', 33, 'Delhi', 'India');
sqlite> insert into CRICKETERS values('Jonathan', 'Trott', 38, 'CapeTown',
'SouthAfrica');
sqlite> insert into CRICKETERS values('Kumara', 'Sangakkara', 41, 'Matale', 'Srilanka');
sqlite> insert into CRICKETERS values('Virat', 'Kohli', 30, 'Delhi', 'India');
sqlite> insert into CRICKETERS values('Rohit', 'Sharma', 32, 'Nagpur', 'India');
sqlite>
```

Following SELECT query retrieves the values of the columns FIRST_NAME, LAST_NAME and, COUNTRY from the CRICKETERS table.

```
sqlite> SELECT FIRST_NAME, LAST_NAME, COUNTRY FROM CRICKETERS;
Shikhar|Dhawan|India
Jonathan|Trott|SouthAfrica
Kumara|Sangakkara|Srilanka
```

```
Virat|Kohli|India
Rohit|Sharma|India
sqlite>
```

As you observe, the SELECT statement of the SQLite database just returns the records of the specified tables. To get a formatted output you need to set the **header**, and **mode** using the respective commands before the SELECT statement as shown below:

```
sqlite> .header on
sqlite> .mode column
sqlite> SELECT FIRST_NAME, LAST_NAME, COUNTRY FROM CRICKETERS;
First_Name    Last_Name          Country
-----        -----
Shikhar       Dhawan            India
Jonathan      Trott             SouthAfric
Kumara        Sangakkara       Srilanka
Virat         Kohli             India
Rohit         Sharma            India
sqlite>
```

If you want to retrieve all the columns of each record, you need to replace the names of the columns with "*" as shown below:

```
sqlite> .header on
sqlite> .mode column
sqlite> SELECT * FROM CRICKETERS;
First_Name    Last_Name    Age      Place_Of_Birth   Country
-----        -----
Shikhar       Dhawan      33       Delhi           India
Jonathan      Trott       38       CapeTown        SouthAfric
Kumara        Sangakkara 41       Matale          Srilanka
Virat         Kohli       30       Delhi           India
Rohit         Sharma      32       Nagpur          India
sqlite>
```

In *SQLite* by default the width of the columns is 10 values beyond this width are chopped (observe the country column of 2nd row in above table). You can set the width of each column to required value using the **.width** command, before retrieving the contents of a table as shown below:

```
sqlite> .width 10, 10, 4, 10, 13
sqlite> SELECT * FROM CRICKETERS;
```

First_Name	Last_Name	Age	Place_Of_B	Country
Shikhar	Dhawan	33	Delhi	India
Jonathan	Trott	38	CapeTown	SouthAfrica
Kumara	Sangakkara	41	Matale	Srilanka
Virat	Kohli	30	Delhi	India
Rohit	Sharma	32	Nagpur	India
sqlite>				

Retrieving data using python

READ Operation on any database means to fetch some useful information from the database. You can fetch data from MYSQL using the `fetch()` method provided by the `sqlite` python module.

The `sqlite3.Cursor` class provides three methods namely `fetchall()`, `fetchmany()` and, `fetchone()` where,

- The `fetchall()` method retrieves all the rows in the result set of a query and returns them as list of tuples. (If we execute this after retrieving few rows it returns the remaining ones).
- The `fetchone()` method fetches the next row in the result of a query and returns it as a tuple.
- The `fetchmany()` method is similar to the `fetchone()` but, it retrieves the next set of rows in the result set of a query, instead of a single row.

Note: A result set is an object that is returned when a cursor object is used to query a table.

Example

Following example fetches all the rows of the `EMPLOYEE` table using the `SELECT` query and from the obtained result set initially, we are retrieving the first row using the `fetchone()` method and then fetching the remaining rows using the `fetchall()` method.

Following Python program shows how to fetch and display records from the `COMPANY` table created in the above example.

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
```

```
cursor = conn.cursor()

#Retrieving data
cursor.execute('' 'SELECT * from EMPLOYEE' '')

#Fetching 1st row from the table
result = cursor.fetchone();
print(result)

#Fetching 1st row from the table
result = cursor.fetchall();
print(result)

#Commit your changes in the database
conn.commit()

#Closing the connection
conn.close()
```

Output

```
('Ramya', 'Rama priya', 27, 'F', 9000.0)
[('Vinay', 'Battacharya', 20, 'M', 6000.0),
 ('Sharukh', 'Sheik', 25, 'M', 8300.0),
 ('Sarmista', 'Sharma', 26, 'F', 10000.0),
 ('Triphthi', 'Mishra', 24, 'F', 6000.0)]
```

6. Python SQLite — Where Clause

If you want to fetch, delete or, update particular rows of a table in SQLite, you need to use the where clause to specify condition to filter the rows of the table for the operation.

For example, if you have a SELECT statement with where clause, only the rows which satisfies the specified condition will be retrieved.

Syntax

Following is the syntax of the WHERE clause in SQLite:

```
SELECT column1, column2, columnN  
FROM table_name  
WHERE [search_condition]
```

You can specify a search_condition using comparison or logical operators. like `>`, `<`, `=`, `LIKE`, `NOT`, etc. The following examples would make this concept clear.

Example

Assume we have created a table with name CRICKETERS using the following query:

```
sqlite> CREATE TABLE CRICKETERS (  
        First_Name VARCHAR(255),  
        Last_Name VARCHAR(255),  
        Age int,  
        Place_Of_Birth VARCHAR(255),  
        Country VARCHAR(255)  
    );  
sqlite>
```

And if we have inserted 5 records in to it using INSERT statements as:

```
sqlite> insert into CRICKETERS values('Shikhar', 'Dhawan', 33, 'Delhi',  
'India');  
sqlite> insert into CRICKETERS values('Jonathan', 'Trott', 38, 'CapeTown',  
'SouthAfrica');  
sqlite> insert into CRICKETERS values('Kumara', 'Sangakkara', 41, 'Matale',  
'Srilanka');  
sqlite> insert into CRICKETERS values('Virat', 'Kohli', 30, 'Delhi', 'India');  
sqlite> insert into CRICKETERS values('Rohit', 'Sharma', 32, 'Nagpur',  
'India');
```

```
sqlite>
```

Following SELECT statement retrieves the records whose age is greater than 35:

```
sqlite> SELECT * FROM CRICKETERS WHERE AGE > 35;
First_Name  Last_Name   Age   Place_Of_B  Country
-----
Jonathan    Trott       38    CapeTown     SouthAfrica
Kumara      Sangakkara  41    Matale       Srilanka
sqlite>
```

Where clause using python

The Cursor object/class contains all the methods to execute queries and fetch data, etc. The cursor method of the connection class returns a cursor object.

Therefore, to create a table in SQLite database using python:

- Establish connection with a database using the connect() method.
- Create a cursor object by invoking the cursor() method on the above created connection object.
- Now execute the CREATE TABLE statement using the execute() method of the Cursor class.

Example

Following example creates a table named Employee and populates it. Then using the where clause it retrieves the records with age value less than 23.

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

#Doping EMPLOYEE table if already exists.
cursor.execute("DROP TABLE IF EXISTS EMPLOYEE")
sql = '''CREATE TABLE EMPLOYEE(
          FIRST_NAME  CHAR(20) NOT NULL,
          LAST_NAME  CHAR(20),
```

```

        AGE INT,
        SEX CHAR(1),
        INCOME FLOAT)'''

cursor.execute(sql)

#Populating the table

cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
    INCOME) VALUES ('Ramya', 'Rama priya', 27, 'F', 9000)'''')
cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
    INCOME) VALUES ('Vinay', 'Battacharya', 20, 'M', 6000)'''')
cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
    INCOME) VALUES ('Sharukh', 'Sheik', 25, 'M', 8300)'''')
cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
    INCOME) VALUES ('Sarmista', 'Sharma', 26, 'F', 10000)'''')
cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX,
    INCOME) VALUES ('Triphthi', 'Mishra', 24, 'F', 6000)'''')

#Retrieving specific records using the where clause

cursor.execute("SELECT * from EMPLOYEE WHERE AGE <23")

print(cursor.fetchall())

#Commit your changes in the database

conn.commit()

#Closing the connection

conn.close()

```

Output

```
[('Vinay', 'Battacharya', 20, 'M', 6000.0)]
```

7. Python SQLite — Order By

While fetching data using SELECT query, you will get the records in the same order in which you have inserted them.

You can sort the results in desired order (ascending or descending) using the **Order By** clause. By default, this clause sorts results in ascending order, if you need to arrange them in descending order you need to use "DESC" explicitly.

Syntax

Following is the syntax of the ORDER BY clause in SQLite.

```
SELECT column-list
FROM table_name
[WHERE condition]
[ORDER BY column1, column2, .. columnN] [ASC | DESC];
```

Example

Assume we have created a table with name CRICKETERS using the following query:

```
sqlite> CREATE TABLE CRICKETERS (
    First_Name VARCHAR(255),
    Last_Name VARCHAR(255),
    Age int,
    Place_Of_Birth VARCHAR(255),
    Country VARCHAR(255)
);
sqlite>
```

And if we have inserted 5 records in to it using INSERT statements as:

```
sqlite> insert into CRICKETERS values('Shikhar', 'Dhawan', 33, 'Delhi',
'India');
sqlite> insert into CRICKETERS values('Jonathan', 'Trott', 38, 'CapeTown',
'SouthAfrica');
sqlite> insert into CRICKETERS values('Kumara', 'Sangakkara', 41, 'Matale',
'Srilanka');
sqlite> insert into CRICKETERS values('Virat', 'Kohli', 30, 'Delhi', 'India');
sqlite> insert into CRICKETERS values('Rohit', 'Sharma', 32, 'Nagpur',
'India');
```

```
sqlite>
```

Following SELECT statement retrieves the rows of the CRICKETERS table in the ascending order of their age:

```
sqlite> SELECT * FROM CRICKETERS ORDER BY AGE;
First_Name  Last_Name   Age   Place_Of_B  Country
-----  -----  -----  -----  -----
Virat      Kohli       30    Delhi        India
Rohit      Sharma      32    Nagpur       India
Shikhar    Dhawan      33    Delhi        India
Jonathan   Trott       38    CapeTown     SouthAfrica
Kumara     Sangakkara  41    Matale       Srilanka
sqlite>
```

You can use more than one column to sort the records of a table. Following SELECT statements sorts the records of the CRICKETERS table based on the columns *AGE* and *FIRST_NAME*.

```
sqlite> SELECT * FROM CRICKETERS ORDER BY AGE, FIRST_NAME;
First_Name  Last_Name   Age   Place_Of_B  Country
-----  -----  -----  -----  -----
Virat      Kohli       30    Delhi        India
Rohit      Sharma      32    Nagpur       India
Shikhar    Dhawan      33    Delhi        India
Jonathan   Trott       38    CapeTown     SouthAfrica
Kumara     Sangakkara  41    Matale       Srilanka
sqlite>
```

By default, the **ORDER BY** clause sorts the records of a table in ascending order you can arrange the results in descending order using DESC as:

```
sqlite> SELECT * FROM CRICKETERS ORDER BY AGE DESC;
First_Name  Last_Name   Age   Place_Of_B  Country
-----  -----  -----  -----  -----
Kumara     Sangakkara  41    Matale       Srilanka
Jonathan   Trott       38    CapeTown     SouthAfrica
Shikhar    Dhawan      33    Delhi        India
Rohit      Sharma      32    Nagpur       India
Virat      Kohli       30    Delhi        India
sqlite>
```

ORDER BY clause using python

To retrieve contents of a table in specific order, invoke the execute() method on the cursor object and, pass the SELECT statement along with ORDER BY clause, as a parameter to it.

Example

In the following example we are creating a table with name and Employee, populating it, and retrieving its records back in the (ascending) order of their age, using the ORDER BY clause.

```
import psycopg2

#establishing the connection
conn = psycopg2.connect(database="mydb", user='postgres', password='password',
host='127.0.0.1', port= '5432')

#Setting auto commit false
conn.autocommit = True

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

#Doping EMPLOYEE table if already exists.
cursor.execute("DROP TABLE IF EXISTS EMPLOYEE")
#Creating a table
sql = '''CREATE TABLE EMPLOYEE(
            FIRST_NAME  CHAR(20) NOT NULL,
            LAST_NAME   CHAR(20),
            AGE INT, SEX CHAR(1),
            INCOME INT,
            CONTACT INT)'''

cursor.execute(sql)

#Populating the table
#Populating the table
cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX, INCOME)
VALUES ('Ramya', 'Rama priya', 27, 'F', 9000),('Vinay', 'Battacharya', 20, 'M',
6000), ('Sharukh', 'Sheik', 25, 'M', 8300), ('Sarmista', 'Sharma', 26, 'F',
10000),('Tripthi', 'Mishra', 24, 'F', 6000)'''')
```

```
conn.commit()

#Retrieving specific records using the ORDER BY clause
cursor.execute("SELECT * from EMPLOYEE ORDER BY AGE")

print(cursor.fetchall())

#Commit your changes in the database
conn.commit()

#Closing the connection
conn.close()
```

Output

```
[('Vinay', 'Battacharya', 20, 'M', 6000, None),
 ('Triphhi', 'Mishra', 24, 'F', 6000, None),
 ('Sharukh', 'Sheik', 25, 'M', 8300, None),
 ('Sarmista', 'Sharma', 26, 'F', 10000, None),
 ('Ramya', 'Rama priya', 27, 'F', 9000, None)]
```

8. Python SQLite — Update Table

UPDATE Operation on any database implies modifying the values of one or more records of a table, which are already available in the database. You can update the values of existing records in SQLite using the UPDATE statement.

To update specific rows, you need to use the WHERE clause along with it.

Syntax

Following is the syntax of the UPDATE statement in SQLite:

```
UPDATE table_name  
SET column1 = value1, column2 = value2...., columnN = valueN  
WHERE [condition];
```

Example

Assume we have created a table with name CRICKETERS using the following query:

```
sqlite> CREATE TABLE CRICKETERS (  
           First_Name VARCHAR(255),  
           Last_Name VARCHAR(255),  
           Age int,  
           Place_Of_Birth VARCHAR(255),  
           Country VARCHAR(255)  
      );  
sqlite>
```

And if we have inserted 5 records in to it using INSERT statements as:

```
sqlite> insert into CRICKETERS values('Shikhar', 'Dhawan', 33, 'Delhi',  
'India');  
sqlite> insert into CRICKETERS values('Jonathan', 'Trott', 38, 'CapeTown',  
'SouthAfrica');  
sqlite> insert into CRICKETERS values('Kumara', 'Sangakkara', 41, 'Matale',  
'Srilanka');  
sqlite> insert into CRICKETERS values('Virat', 'Kohli', 30, 'Delhi', 'India');  
sqlite> insert into CRICKETERS values('Rohit', 'Sharma', 32, 'Nagpur',  
'India');  
sqlite>
```

Following Statement modifies the age of the cricketer, whose first name is **Shikhar**:

```
sqlite> UPDATE CRICKETERS SET AGE = 45 WHERE FIRST_NAME = 'Shikhar' ;
sqlite>
```

If you retrieve the record whose FIRST_NAME is Shikhar you observe that the age value has been changed to 45:

```
sqlite> SELECT * FROM CRICKETERS WHERE FIRST_NAME = 'Shikhar';
First_Name  Last_Name   Age   Place_Of_B  Country
-----
Shikhar     Dhawan      45    Delhi        India
sqlite>
```

If you haven't used the WHERE clause values of all the records will be updated. Following UPDATE statement increases the age of all the records in the CRICKETERS table by 1:

```
sqlite> UPDATE CRICKETERS SET AGE = AGE+1;
sqlite>
```

If you retrieve the contents of the table using SELECT command, you can see the updated values as:

```
sqlite> SELECT * FROM CRICKETERS;
First_Name  Last_Name   Age   Place_Of_B  Country
-----
Shikhar     Dhawan      46    Delhi        India
Jonathan    Trott       39    CapeTown     SouthAfrica
Kumara      Sangakkara  42    Matale       Srilanka
Virat       Kohli       31    Delhi        India
Rohit       Sharma      33    Nagpur       India
sqlite>
```

Updating existing records using python

To add records to an existing table in SQLite database:

- Import sqlite3 package.
- Create a connection object using the `connect()` method by passing the name of the database as a parameter to it.
- The `cursor()` method returns a cursor object using which you can communicate with SQLite3 . Create a cursor object by invoking the `cursor()` object on the (above created) Connection object.

- Then, invoke the `execute()` method on the cursor object, by passing an UPDATE statement as a parameter to it.

Example

Following Python example, creates a table with name EMPLOYEE, inserts 5 records into it and, increases the age of all the male employees by 1:

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

#Doping EMPLOYEE table if already exists.
cursor.execute("DROP TABLE IF EXISTS EMPLOYEE")
#Creating table as per requirement
sql = '''CREATE TABLE EMPLOYEE(
    FIRST_NAME  CHAR(20) NOT NULL,
    LAST_NAME  CHAR(20),
    AGE INT,
    SEX CHAR(1),
    INCOME FLOAT)'''

cursor.execute(sql)

#Inserting data
cursor.execute('''INSERT INTO EMPLOYEE(FIRST_NAME, LAST_NAME, AGE, SEX, INCOME)
VALUES ('Ramya', 'Rama priya', 27, 'F', 9000),('Vinay', 'Battacharya', 20, 'M',
6000), ('Sharukh', 'Sheik', 25, 'M', 8300), ('Sarmista', 'Sharma', 26, 'F',
10000),('Triphthi', 'Mishra', 24, 'F', 6000)''')
conn.commit()

#Fetching all the rows before the update
print("Contents of the Employee table: ")
cursor.execute('''SELECT * from EMPLOYEE''')
print(cursor.fetchall())

#Updating the records
```

```

sql = '''UPDATE EMPLOYEE SET AGE=AGE+1 WHERE SEX = 'M' '''
cursor.execute(sql)
print("Table updated..... ")

#Fetching all the rows after the update
print("Contents of the Employee table after the update operation: ")
cursor.execute('''SELECT * from EMPLOYEE''')
print(cursor.fetchall())

#Commit your changes in the database
conn.commit()

#Closing the connection
conn.close()

```

Output

```

Contents of the Employee table:
[('Ramya', 'Rama priya', 27, 'F', 9000.0), ('Vinay', 'Battacharya', 20, 'M',
6000.0), ('Sharukh', 'Sheik', 25, 'M', 8300.0), ('Sarmista', 'Sharma', 26, 'F',
10000.0), ('Triphthi', 'Mishra', 24, 'F', 6000.0)]
Table updated.....  

Contents of the Employee table after the update operation:  

[('Ramya', 'Rama priya', 27, 'F', 9000.0), ('Vinay', 'Battacharya', 21, 'M',
6000.0), ('Sharukh', 'Sheik', 26, 'M', 8300.0), ('Sarmista', 'Sharma', 26, 'F',
10000.0), ('Triphthi', 'Mishra', 24, 'F', 6000.0)]

```

9. Python SQLite — Delete Data

To delete records from a SQLite table, you need to use the DELETE FROM statement. To remove specific records, you need to use WHERE clause along with it.

Syntax

Following is the syntax of the DELETE query in SQLite:

```
DELETE FROM table_name [WHERE Clause]
```

Example

Assume we have created a table with name CRICKETERS using the following query:

```
sqlite> CREATE TABLE CRICKETERS (
    First_Name VARCHAR(255),
    Last_Name VARCHAR(255),
    Age int,
    Place_Of_Birth VARCHAR(255),
    Country VARCHAR(255)
);
sqlite>
```

And if we have inserted 5 records in to it using INSERT statements as:

```
sqlite> insert into CRICKETERS values('Shikhar', 'Dhawan', 33, 'Delhi',
'India');
sqlite> insert into CRICKETERS values('Jonathan', 'Trott', 38, 'CapeTown',
'SouthAfrica');
sqlite> insert into CRICKETERS values('Kumara', 'Sangakkara', 41, 'Matale',
'Srilanka');
sqlite> insert into CRICKETERS values('Virat', 'Kohli', 30, 'Delhi', 'India');
sqlite> insert into CRICKETERS values('Rohit', 'Sharma', 32, 'Nagpur',
'India');
sqlite>
```

Following statement deletes the record of the cricketer whose last name is 'Sangakkara'.

```
sqlite> DELETE FROM CRICKETERS WHERE LAST_NAME = 'Sangakkara';
sqlite>
```

If you retrieve the contents of the table using the SELECT statement, you can see only 4 records since we have deleted one.

```
sqlite> SELECT * FROM CRICKETERS;
First_Name    Last_Name    Age    Place_Of_B    Country
-----
Shikhar        Dhawan      46     Delhi          India
Jonathan       Trott       39     CapeTown       SouthAfrica
Virat          Kohli       31     Delhi          India
Rohit          Sharma      33     Nagpur         India
sqlite>
```

If you execute the DELETE FROM statement without the WHERE clause, all the records from the specified table will be deleted.

```
sqlite> DELETE FROM CRICKETERS;
sqlite>
```

Since you have deleted all the records, if you try to retrieve the contents of the CRICKETERS table, using SELECT statement you will get an empty result set as shown below:

```
sqlite> SELECT * FROM CRICKETERS;
sqlite>
```

Deleting data using python

To add records to an existing table in SQLite database:

- Import sqlite3 package.
- Create a connection object using the *connect()* method by passing the name of the database as a parameter to it.
- The ***cursor()*** method returns a cursor object using which you can communicate with SQLite3 . Create a cursor object by invoking the cursor() object on the (above created) Connection object.
- Then, invoke the *execute()* method on the cursor object, by passing an DELETE statement as a parameter to it.

Example

Following python example deletes the records from EMPLOYEE table with age value greater than 25.

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

#Retrieving contents of the table
print("Contents of the table: ")
cursor.execute('''SELECT * from EMPLOYEE''')
print(cursor.fetchall())

#Deleting records
cursor.execute('''DELETE FROM EMPLOYEE WHERE AGE > 25''')

#Retrieving data after delete
print("Contents of the table after delete operation ")
cursor.execute("SELECT * from EMPLOYEE")
print(cursor.fetchall())

#Commit your changes in the database
conn.commit()

#Closing the connection
conn.close()
```

Output

```
Contents of the table:
[('Ramya', 'Rama priya', 27, 'F', 9000.0), ('Vinay', 'Battacharya', 21, 'M', 6000.0), ('Sharukh', 'Sheik', 26, 'M', 8300.0), ('Sarmista', 'Sharma', 26, 'F', 10000.0), ('Tripti', 'Mishra', 24, 'F', 6000.0)]
Contents of the table after delete operation
[('Vinay', 'Battacharya', 21, 'M', 6000.0), ('Tripti', 'Mishra', 24, 'F', 6000.0)]
```

10. Python SQLite — Drop Table

You can remove an entire table using the DROP TABLE statement. You just need to specify the name of the table you need to delete.

Syntax

Following is the syntax of the DROP TABLE statement in PostgreSQL:

```
DROP TABLE table_name;
```

Example

Assume we have created two tables with name CRICKETERS and EMPLOYEES using the following queries:

```
sqlite> CREATE TABLE CRICKETERS (First_Name VARCHAR(255), Last_Name  
VARCHAR(255), Age int, Place_Of_Birth VARCHAR(255), Country VARCHAR(255));  
sqlite> CREATE TABLE EMPLOYEE(FIRST_NAME CHAR(20) NOT NULL, LAST_NAME  
CHAR(20), AGE INT, SEX CHAR(1), INCOME FLOAT);  
sqlite>
```

Now if you verify the list of tables using the **.tables** command, you can see the above created tables in it (list) as:

```
sqlite> .tables  
CRICKETERS EMPLOYEE  
sqlite>
```

Following statement deletes the table named Employee from the database:

```
sqlite> DROP table employee;  
sqlite>
```

Since you have deleted the Employee table, if you retrieve the list of tables again, you can observe only one table in it.

```
sqlite> .tables  
CRICKETERS  
sqlite>
```

If you try to delete the Employee table again, since you have already deleted it you will get an error saying "no such table" as shown below:

```
sqlite> DROP table employee;
```

```
Error: no such table: employee
sqlite>
```

To resolve this, you can use the IF EXISTS clause along with the DELTE statement. This removes the table if it exists else skips the DLETE operation.

```
sqlite> DROP table IF EXISTS employee;
sqlite>
```

Dropping a table using Python

You can drop a table whenever you need to, using the DROP statement of MYSQL, but you need to be very careful while deleting any existing table because the data lost will not be recovered after deleting a table.

Example

To drop a table from a SQLite3 database using python invoke the **execute()** method on the cursor object and pass the drop statement as a parameter to it.

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

#Doping EMPLOYEE table if already exists
cursor.execute("DROP TABLE emp")
print("Table dropped... ")

#Commit your changes in the database
conn.commit()

#Closing the connection
conn.close()
```

Output

```
Table dropped...
```

11. Python SQLite — Limit

While fetching records if you want to limit them by a particular number, you can do so, using the LIMIT clause of SQLite.

Syntax

Following is the syntax of the LIMIT clause in SQLite:

```
SELECT column1, column2, columnN  
FROM table_name  
LIMIT [no of rows]
```

Example

Assume we have created a table with name CRICKETERS using the following query:

```
sqlite> CREATE TABLE CRICKETERS (  
           First_Name VARCHAR(255),  
           Last_Name VARCHAR(255),  
           Age int,  
           Place_Of_Birth VARCHAR(255),  
           Country VARCHAR(255)  
      );  
sqlite>
```

And if we have inserted 5 records in to it using INSERT statements as:

```
sqlite> insert into CRICKETERS values('Shikhar', 'Dhawan', 33, 'Delhi',  
'India');  
sqlite> insert into CRICKETERS values('Jonathan', 'Trott', 38, 'CapeTown',  
'SouthAfrica');  
sqlite> insert into CRICKETERS values('Kumara', 'Sangakkara', 41, 'Matale',  
'Srilanka');  
sqlite> insert into CRICKETERS values('Virat', 'Kohli', 30, 'Delhi', 'India');  
sqlite> insert into CRICKETERS values('Rohit', 'Sharma', 32, 'Nagpur',  
'India');  
sqlite>
```

Following statement retrieves the first 3 records of the Cricketers table using the LIMIT clause:

```
sqlite> SELECT * FROM CRICKETERS LIMIT 3;
First_Name  Last_Name   Age   Place_Of_B  Country
-----
Shikhar     Dhawan      33    Delhi        India
Jonathan    Trott       38    CapeTown     SouthAfrica
Kumara      Sangakkara  41    Matale       Srilanka
sqlite>
```

If you need to limit the records starting from nth record (not 1st), you can do so, using OFFSET along with LIMIT.

```
sqlite> SELECT * FROM CRICKETERS LIMIT 3 OFFSET 2;
First_Name  Last_Name   Age   Place_Of_B  Country
-----
Kumara      Sangakkara  41    Matale       Srilanka
Virat       Kohli        30    Delhi        India
Rohit       Sharma       32    Nagpur       India
sqlite>
```

LIMIT clause using Python

If you Invoke the execute() method on the cursor object by passing the SELECT query along with the LIMIT clause, you can retrieve required number of records.

Example

Following python example retrieves the first two records of the EMPLOYEE table using the LIMIT clause.

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

#Retrieving single row
sql = '''SELECT * from EMPLOYEE LIMIT 3'''
```

```
#Executing the query
cursor.execute(sql)

#Fetching the data
result = cursor.fetchall();
print(result)

#Commit your changes in the database
conn.commit()

#Closing the connection
conn.close()
```

Output

```
[('Ramya', 'Rama priya', 27, 'F', 9000.0), ('Vinay', 'Battacharya', 20, 'M',
6000.0), ('Sharukh', 'Sheik', 25, 'M', 8300.0)]
```

12. Python SQLite — Join

When you have divided the data in two tables you can fetch combined records from these two tables using Joins.

Example

Assume we have created a table with name CRICKETERS using the following query:

```
sqlite> CREATE TABLE CRICKETERS (
    First_Name VARCHAR(255),
    Last_Name VARCHAR(255),
    Age int,
    Place_Of_Birth VARCHAR(255),
    Country VARCHAR(255)
);
sqlite>
```

Let us create one more table OdiStats describing the One-day cricket statistics of each player in CRICKETERS table.

```
sqlite> CREATE TABLE ODIStats (
    First_Name VARCHAR(255),
    Matches INT,
    Runs INT,
    AVG FLOAT,
    Centuries INT,
    HalfCenturies INT
);
sqlite>
```

Following statement retrieves data combining the values in these two tables:

```
sqlite> SELECT
    Cricketers.First_Name, Cricketers.Last_Name, Cricketers.Country,
    OdiStats.matches, OdiStats.runs, OdiStats.centuries, OdiStats.halfcenturies
    from Cricketers INNER JOIN OdiStats ON Cricketers.First_Name = OdiStats.First_Name;
First_Name      Last_Name      Country      Matches      Runs      Centuries      HalfCenturies
-----  -----  -----  -----  -----
Shikhar        Dhawan        Indi        133        5518        17          27
```

Jonathan	Trott	Sout	68	2819	4	22
Kumara	Sangakkara	Sril	404	14234	25	93
Virat	Kohli	Indi	239	11520	43	54
Rohit	Sharma	Indi	218	8686	24	42
sqlite>						

Join clause using python

Following SQLite example, demonstrates the JOIN clause using python:

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()

#Retrieving data
sql = '''SELECT * from EMP INNER JOIN CONTACT ON EMP.CONTACT = CONTACT.ID'''

#Executing the query
cursor.execute(sql)

#Fetching 1st row from the table
result = cursor.fetchall();

print(result)

#Commit your changes in the database
conn.commit()

#Closing the connection
conn.close()
```

Output

[('Ramya', 'Rama priya', 27, 'F', 9000.0, 101, 101, 'Krishna@mymail.com', 'Hyderabad'), ('Vinay', 'Battacharya', 20, 'M', 6000.0, 102, 102,

```
'Raja@mymail.com', 'Vishakhapatnam'), ('Sharukh', 'Sheik', 25, 'M', 8300.0,  
103, 103, 'Krishna@mymail.com', 'Pune'), ('Sarmista', 'Sharma', 26, 'F',  
10000.0, 104, 104, 'Raja@mymail.com', 'Mumbai')]
```

13. Python SQLite — Cursor Object

The `sqlite3.Cursor` class is an instance using which you can invoke methods that execute SQLite statements, fetch data from the result sets of the queries. You can create **Cursor** object using the `cursor()` method of the Connection object/class.

Example

```
import sqlite3

#Connecting to sqlite
conn = sqlite3.connect('example.db')

#Creating a cursor object using the cursor() method
cursor = conn.cursor()
```

Methods

Following are the various methods provided by the Cursor class/object.

Method	Description
execute()	This routine executes an SQL statement. The SQL statement may be parameterized (i.e., placeholders instead of SQL literals). The <code>psycopg2</code> module supports placeholder using <code>%s</code> sign For example: <code>cursor.execute("insert into people values (%s, %s)", (who, age))</code>
executemany()	This routine executes an SQL command against all parameter sequences or mappings found in the sequence <code>sql</code> .
fetchone()	This method fetches the next row of a query result set, returning a single sequence, or <code>None</code> when no more data is available.
fetchmany()	This routine fetches the next set of rows of a query result, returning a list. An empty list is returned when no more rows are available. The method tries to fetch as many rows as indicated by the <code>size</code> parameter.
fetchall()	This routine fetches all (remaining) rows of a query result, returning a list. An empty list is returned when no rows are available.

Properties

Following are the properties of the Cursor class:

Method	Description
arraySize	This is a read/write property you can set the number of rows returned by the fetchmany() method.
description	This is a read only property which returns the list containing the description of columns in a result-set.
lastrowid	This is a read only property, if there are any auto-incremented columns in the table, this returns the value generated for that column in the last INSERT or, UPDATE operation.
rowcount	This returns the number of rows returned/updated in case of SELECT and UPDATE operations.
connection	This read-only attribute provides the SQLite database Connection used by the Cursor object.